

You too can experience rapid rotation—if your stomach can take the high angular velocity and centripetal acceleration of some of the faster amusement park rides. If not, try the slower merry-go-round or Ferris wheel. Rotating carnival rides have rotational KE as well as angular momentum.



CHAPTER 8

Rotational Motion

Until now, we have been concerned mainly with translational motion. We discussed the kinematics and dynamics of translational motion (the role of force), and the energy and momentum associated with it. In this Chapter we will deal with rotational motion. We will discuss the kinematics of rotational motion and then its dynamics (involving torque), as well as rotational kinetic energy and angular momentum (the rotational analog of linear momentum). We will find many analogies with translational motion, which will make our study easier. Our understanding of the world around us will be increased significantly—from rotating bicycle wheels and compact disks to amusement park rides, a spinning skater, the rotating Earth, and a centrifuge—and there may be a few surprises.

We will consider mainly the rotation of rigid objects. A **rigid object** is an object with a definite shape that doesn't change, so that the particles composing it stay in fixed positions relative to one another. Any real object is capable of vibrating or deforming when a force is exerted on it. But these effects are often very small, so the concept of an ideal rigid object is very useful as a good approximation.

8-1 Angular Quantities

We saw in Chapter 7 (Section 7-8) that the motion of a rigid object can be analyzed as the translational motion of the object's center of mass, plus rotational motion *about* its center of mass. We have already discussed translational motion in detail, so now we focus on purely rotational motion. By *purely rotational motion*, we mean that all points in the object move in circles, such as the point P in the rotating wheel of Fig. 8-1, and that the centers of these circles all lie on a line called the **axis of rotation**. In Fig. 8-1 the axis of rotation is perpendicular to the page and passes through point O.

Every point in an object rotating about a fixed axis moves in a circle (shown dashed in Fig. 8-1 for point P) whose center is on the axis and whose radius is r , the distance of that point from the axis of rotation. A straight line drawn from the axis to any point sweeps out the same angle θ in the same time.

To indicate the angular position of a rotating object, or how far it has rotated, we specify the angle θ of some particular line in the object (red in Fig. 8-1) with respect to a reference line, such as the x axis in Fig. 8-1. A point in the object, such as P in Fig. 8-1, moves through an angle θ when it travels the distance l measured along the circumference of its circular path. Angles are commonly measured in degrees, but the mathematics of circular motion is much simpler if we use the *radian* for angular measure. One **radian** (abbreviated rad) is defined as the angle subtended by an arc whose length is equal to the radius. For example, in Fig. 8-1b, point P is a distance r from the axis of rotation, and it has moved a distance l along the arc of a circle. The arc length l is said to “subtend” the angle θ . If $l = r$, then θ is exactly equal to 1 rad. In radians, any angle θ is given by

$$\theta = \frac{l}{r}, \quad (8-1a)$$

where r is the radius of the circle, and l is the arc length subtended by the angle specified in radians. If $l = r$, then $\theta = 1$ rad.

The radian is dimensionless since it is the ratio of two lengths. Nonetheless when giving an angle in radians, we always mention rad to remind us it is not degrees. It is often useful to rewrite Eq. 8-1a in terms of arc length l :

$$l = r\theta. \quad (8-1b)$$

Radians can be related to degrees in the following way. In a complete circle there are 360° , which must correspond to an arc length equal to the circumference of the circle, $l = 2\pi r$. Thus $\theta = l/r = 2\pi r/r = 2\pi$ rad in a complete circle, so

$$360^\circ = 2\pi \text{ rad.}$$

One radian is therefore $360^\circ/2\pi \approx 360^\circ/6.28 \approx 57.3^\circ$. An object that makes one complete revolution (rev) has rotated through 360° , or 2π radians:

$$1 \text{ rev} = 360^\circ = 2\pi \text{ rad.}$$

EXAMPLE 8-1 Bike wheel. A bike wheel rotates 4.50 revolutions. How many radians has it rotated?

APPROACH All we need is a straightforward conversion of units using

$$1 \text{ revolution} = 360^\circ = 2\pi \text{ rad} = 6.28 \text{ rad.}$$

SOLUTION

$$4.50 \text{ revolutions} = (4.50 \text{ rev}) \left(2\pi \frac{\text{rad}}{\text{rev}} \right) = 9.00\pi \text{ rad} = 28.3 \text{ rad.}$$

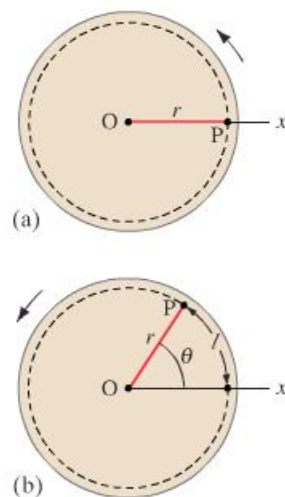


FIGURE 8-1 Looking at a wheel that is rotating counterclockwise about an axis through the wheel's center at O (axis perpendicular to the page). Each point, such as point P, moves in a circular path; l is the distance P travels as the wheel rotates through the angle θ .

θ in radians

l rad: arc length = radius

Conversion, degrees to rad

$1 \text{ rad} \approx 57.3^\circ$

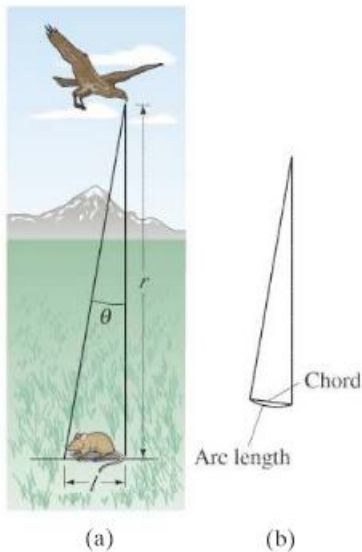


FIGURE 8-2 (a) Example 8-2. (b) For small angles, arc length and the chord length (straight line) are nearly equal.

EXAMPLE 8-2 Birds of prey—in radians. A particular bird's eye can just distinguish objects that subtend an angle no smaller than about 3×10^{-4} rad. (a) How many degrees is this? (b) How small an object can the bird just distinguish when flying at a height of 100 m (Fig. 8-2a)?

APPROACH For (a) we use the relation $360^\circ = 2\pi$ rad. For (b) we use Eq. 8-1b, $l = r\theta$, to find the arc length.

SOLUTION (a) We convert 3×10^{-4} rad to degrees:

$$(3 \times 10^{-4} \text{ rad}) \left(\frac{360^\circ}{2\pi \text{ rad}} \right) = 0.017^\circ.$$

(b) We use Eq. 8-1b, $l = r\theta$. For small angles, the arc length l and the chord length are approximately[†] the same (Fig. 8-2b). Since $r = 100$ m and $\theta = 3 \times 10^{-4}$ rad, we find

$$l = (100 \text{ m})(3 \times 10^{-4} \text{ rad}) = 3 \times 10^{-2} \text{ m} = 3 \text{ cm}.$$

A bird can distinguish a small mouse (about 3 cm long) from a height of 100 m. That is good eyesight.

NOTE Had the angle been given in degrees, we would first have had to convert it to radians to make this calculation. Equation 8-1 is valid *only* if the angle is specified in radians. Degrees (or revolutions) won't work.

To describe rotational motion, we make use of angular quantities, such as angular velocity and angular acceleration. These are defined in analogy to the corresponding quantities in linear motion, and are chosen to describe the rotating object as a whole, so they are the same for each point in the rotating object. Each point in a rotating object may also have translational velocity and acceleration, but they have different values for different points in the object.

When an object, such as the bicycle wheel in Fig. 8-3, rotates from some initial position, specified by θ_1 , to some final position, θ_2 , its *angular displacement* is

$$\Delta\theta = \theta_2 - \theta_1.$$

The *angular velocity* (denoted by ω , the Greek lowercase letter omega) is defined in analogy with linear (translational) velocity that was discussed in Chapter 2. Instead of linear displacement, we use the angular displacement. Thus the **average angular velocity** is defined as

$$\bar{\omega} = \frac{\Delta\theta}{\Delta t}, \quad (8-2a)$$

where $\Delta\theta$ is the angle through which the object has rotated in the time interval Δt . We define the **instantaneous angular velocity** as the very small angle $\Delta\theta$, through which the object turns in the very short time interval Δt :

$$\omega = \lim_{\Delta t \rightarrow 0} \frac{\Delta\theta}{\Delta t}. \quad (8-2b)$$

Angular velocity is generally specified in radians per second (rad/s). Note that *all points in a rigid object rotate with the same angular velocity*, since every position in the object moves through the same angle in the same time interval.


An object such as the wheel in Fig. 8-3 can rotate about a fixed axis either clockwise or counterclockwise. The direction can be specified with a + or - sign, just as we did in Chapter 2 for linear motion along the +x or -x axis. The usual convention is to choose the angular displacement $\Delta\theta$ and angular velocity ω as positive when the wheel rotates counterclockwise. If the rotation is clockwise, then θ would decrease, so $\Delta\theta$ and ω would be negative.[‡]

[†] Even for an angle as large as 15° , the error in making this estimate is only 1%, but for larger angles the error increases rapidly.

[‡] The vector nature of angular velocity and other angular quantities is discussed in Section 8-9 (optional).

Angular displacement (rad)

FIGURE 8-3 A wheel rotates from (a) initial position θ_1 to (b) final position θ_2 . The angular displacement is $\Delta\theta = \theta_2 - \theta_1$.

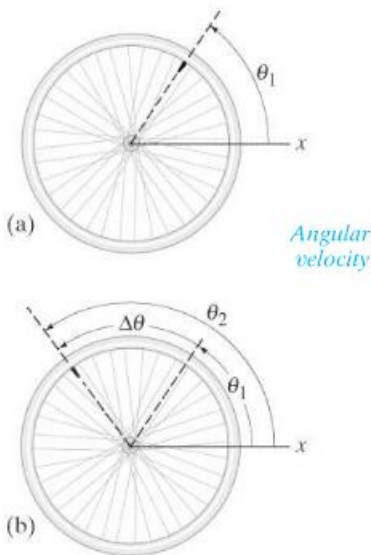

Angular velocity

Angular acceleration (denoted by α , the Greek lowercase letter alpha), in analogy to linear acceleration, is defined as the change in angular velocity divided by the time required to make this change. The **average angular acceleration** is defined as

$$\bar{\alpha} = \frac{\omega_2 - \omega_1}{\Delta t} = \frac{\Delta\omega}{\Delta t}, \quad (8-3a)$$

where ω_1 is the angular velocity initially, and ω_2 is the angular velocity after a time interval Δt . **Instantaneous angular acceleration** is defined in the usual way as the limit of this ratio as Δt approaches zero:

$$\alpha = \lim_{\Delta t \rightarrow 0} \frac{\Delta\omega}{\Delta t}. \quad (8-3b) \quad \text{Angular acceleration}$$

Since ω is the same for all points of a rotating object, Eq. 8-3 tells us that α also will be the same for all points. Thus, ω and α are properties of the rotating object as a whole. With ω measured in radians per second and t in seconds, α will be expressed as radians per second squared (rad/s^2).

Each point or particle of a rotating rigid object has, at any moment, a linear velocity v and a linear acceleration a . We can relate the linear quantities at each point, v and a , to the angular quantities of the rotating object, ω and α . Consider a point P located a distance r from the axis of rotation, as in Fig. 8-4. If the object rotates with angular velocity ω , any point will have a linear velocity whose direction is tangent to its circular path. The magnitude of that point's linear velocity is $v = \Delta l / \Delta t$. From Eq. 8-1b, a change in rotation angle $\Delta\theta$ (in radians) is related to the linear distance traveled by $\Delta l = r \Delta\theta$. Hence

$$v = \frac{\Delta l}{\Delta t} = r \frac{\Delta\theta}{\Delta t}$$

or

$$v = r\omega. \quad (8-4) \quad \text{Linear and angular velocity related}$$

Thus, although ω is the same for every point in the rotating object at any instant, the linear velocity v is greater for points farther from the axis (Fig. 8-5). Note that Eq. 8-4 is valid both instantaneously and on the average.

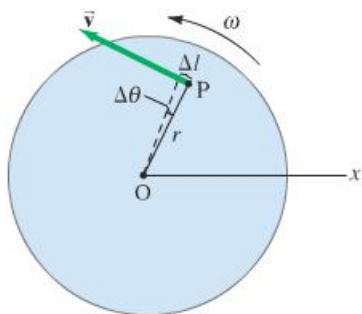


FIGURE 8-4 A point P on a rotating wheel has a linear velocity \vec{v} at any moment.

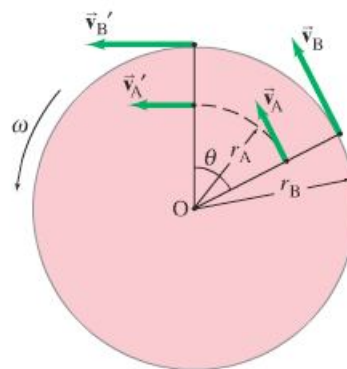


FIGURE 8-5 A wheel rotating uniformly counterclockwise. Two points on the wheel, at distances r_A and r_B from the center, have the same angular velocity ω because they travel through the same angle θ in the same time interval. But the two points have different linear velocities because they travel different distances in the same time interval. Since $r_B > r_A$, then $v_B > v_A$ ($v = r\omega$).

CONCEPTUAL EXAMPLE 8-3 **Is the lion faster than the horse?** On a rotating carousel or merry-go-round, one child sits on a horse near the outer edge and another child sits on a lion halfway out from the center. (a) Which child has the greater linear velocity? (b) Which child has the greater angular velocity?

RESPONSE (a) The *linear* velocity is the distance traveled divided by the time interval. In one rotation the child on the outer edge travels a longer distance than the child near the center, but the time interval is the same for both. Thus the child at the outer edge, on the horse, has the greater linear velocity.
 (b) The *angular* velocity is the angle of rotation divided by the time interval. In one rotation both children rotate through the same angle ($360^\circ = 2\pi$ radians). The two children have the same angular velocity.

If the angular velocity of a rotating object changes, the object as a whole—and each point in it—has an angular acceleration. Each point also has a linear acceleration whose direction is tangent to that point’s circular path. We use Eq. 8-4 ($v = r\omega$) to show that the angular acceleration α is related to the tangential linear acceleration a_{tan} of a point in the rotating object by

$$a_{\text{tan}} = \frac{\Delta v}{\Delta t} = r \frac{\Delta \omega}{\Delta t}$$

or

$$a_{\text{tan}} = r\alpha. \quad (8-5)$$

Tangential acceleration

In this equation, r is the radius of the circle in which the particle is moving, and the subscript “tan” in a_{tan} stands for “tangential.”

The total linear acceleration of a point is the vector sum of two components:

$$\vec{a} = \vec{a}_{\text{tan}} + \vec{a}_{\text{R}},$$

where the radial† component, \vec{a}_{R} , is the radial or “centripetal” acceleration and its direction is toward the center of the point’s circular path; see Fig. 8-6. We saw in Chapter 5 (Eq. 5-1) that $a_{\text{R}} = v^2/r$, and we can rewrite this in terms of ω using Eq. 8-4:

$$a_{\text{R}} = \frac{v^2}{r} = \frac{(r\omega)^2}{r} = \omega^2 r. \quad (8-6)$$

Centripetal (or radial) acceleration

Thus the centripetal acceleration is greater the farther you are from the axis of rotation: the children farthest out on a carousel feel the greatest acceleration. Equations 8-4, 8-5, and 8-6 relate the angular quantities describing the rotation of an object to the linear quantities for each point of the object. Table 8-1 summarizes these relationships.

FIGURE 8-6 On a rotating wheel whose angular speed is increasing, a point P has both tangential and radial (centripetal) components of linear acceleration. (See also Chapter 5.)




TABLE 8-1 Linear and Rotational Quantities

Linear	Type	Rotational	Relation
x	displacement	θ	$x = r\theta$
v	velocity	ω	$v = r\omega$
a_{tan}	acceleration	α	$a_{\text{tan}} = r\alpha$

†“Radial” means along the radius—that is, toward or away from the center or axis.

EXAMPLE 8-4 Angular and linear velocities and accelerations. A carousel is initially at rest. At $t = 0$ it is given a constant angular acceleration $\alpha = 0.060 \text{ rad/s}^2$, which increases its angular velocity for 8.0 s. At $t = 8.0$ s, determine the following quantities: (a) the angular velocity of the carousel; (b) the linear velocity of a child (Fig. 8-7a) located 2.5 m from the center, point P in Fig. 8-7b; (c) the tangential (linear) acceleration of that child; (d) the centripetal acceleration of the child; and (e) the total linear acceleration of the child.

APPROACH The angular acceleration α is constant, so we can use Eq. 8-3a to solve for ω after a time $t = 8.0$ s. With this ω and the given α , we determine the other quantities using the relations we just developed, Eqs. 8-4, 8-5, and 8-6.

SOLUTION (a) Equation 8-3a tells us

$$\bar{\alpha} = \frac{\omega_2 - \omega_1}{\Delta t}.$$

We are given $\Delta t = 8.0$ s, $\bar{\alpha} = 0.060 \text{ rad/s}^2$, and $\omega_1 = 0$. Solving for ω_2 , we get

$$\begin{aligned}\omega_2 &= \omega_1 + \bar{\alpha} \Delta t \\ &= 0 + (0.060 \text{ rad/s}^2)(8.0 \text{ s}) = 0.48 \text{ rad/s}.\end{aligned}$$

During the 8.0-s interval, the carousel has accelerated from $\omega_1 = 0$ (rest) to $\omega_2 = 0.48 \text{ rad/s}$.

(b) The linear velocity of the child with $r = 2.5$ m at time $t = 8.0$ s is found using Eq. 8-4:

$$v = r\omega = (2.5 \text{ m})(0.48 \text{ rad/s}) = 1.2 \text{ m/s}.$$

Note that the “rad” has been dropped here because it is dimensionless (and only a reminder)—it is a ratio of two distances, Eq. 8-1b.

(c) The child’s tangential acceleration is given by Eq. 8-5:

$$a_{\text{tan}} = r\alpha = (2.5 \text{ m})(0.060 \text{ rad/s}^2) = 0.15 \text{ m/s}^2,$$

and it is the same throughout the 8.0-s acceleration interval.

(d) The child’s centripetal acceleration at $t = 8.0$ s is given by Eq. 8-6:

$$a_{\text{R}} = \frac{v^2}{r} = \frac{(1.2 \text{ m/s})^2}{(2.5 \text{ m})} = 0.58 \text{ m/s}^2.$$

(e) The two components of linear acceleration calculated in parts (c) and (d) are perpendicular to each other. Thus the total linear acceleration at $t = 8.0$ s has magnitude


$$\begin{aligned}a &= \sqrt{a_{\text{tan}}^2 + a_{\text{R}}^2} \\ &= \sqrt{(0.15 \text{ m/s}^2)^2 + (0.58 \text{ m/s}^2)^2} = 0.60 \text{ m/s}^2.\end{aligned}$$

Its direction (Fig. 8-7b) is


$$\theta = \tan^{-1}\left(\frac{a_{\text{tan}}}{a_{\text{R}}}\right) = \tan^{-1}\left(\frac{0.15 \text{ m/s}^2}{0.58 \text{ m/s}^2}\right) = 0.25 \text{ rad},$$

so $\theta \approx 15^\circ$.

NOTE The linear acceleration is mostly centripetal, keeping the child moving in a circle with the carousel. The tangential component that speeds up the motion is smaller.

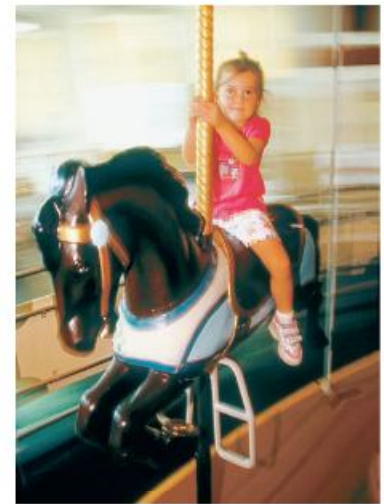

(a)



(b)

FIGURE 8-7 Example 8-4. The total acceleration vector $\vec{a} = \vec{a}_{\text{tan}} + \vec{a}_{\text{R}}$, at $t = 8.0$ s.

We can relate the angular velocity ω to the frequency of rotation, f . The **frequency** is the number of complete revolutions (rev) per second, as we saw in Chapter 5. One revolution (of a wheel, say) corresponds to an angle of 2π radians, and thus $1 \text{ rev/s} = 2\pi \text{ rad/s}$. Hence, in general, the frequency f is related to the angular velocity ω by

Frequency

$$f = \frac{\omega}{2\pi}$$

or

$$\omega = 2\pi f. \quad (8-7)$$

The unit for frequency, revolutions per second (rev/s), is given the special name the hertz (Hz). That is

$$1 \text{ Hz} = 1 \text{ rev/s}.$$

Note that “revolution” is not really a unit, so we can also write $1 \text{ Hz} = 1 \text{ s}^{-1}$.

The time required for one complete revolution is called the **period** T , and it is related to the frequency by

Period

$$T = \frac{1}{f}. \quad (8-8)$$

If a particle rotates at a frequency of three revolutions per second, then the period of each revolution is $\frac{1}{3}$ s.

EXERCISE A In Example 8-4, we found that the carousel, after 8.0 s, rotates at an angular velocity $\omega = 0.48 \text{ rad/s}$, and continues to do so after $t = 8.0 \text{ s}$ because the acceleration ceased. What are the frequency and period of the carousel?



PHYSICS APPLIED

Hard drive
and bit speed

EXAMPLE 8-5 Hard drive. The platter of the hard drive of a computer rotates at 7200 rpm (revolutions per minute = rev/min). (a) What is the angular velocity of the platter? (b) If the reading head of the drive is located 3.00 cm from the rotation axis, what is the linear speed of the point on the platter just below it? (c) If a single bit requires $0.50 \mu\text{m}$ of length along the direction of motion, how many bits per second can the writing head write when it is 3.00 cm from the axis?

APPROACH We use the given frequency f to find the angular velocity ω of the platter and then the linear speed of a point on the platter ($v = r\omega$). The bit rate is found by dividing the linear speed by the length of one bit ($v = \text{distance}/\text{time}$).

SOLUTION (a) First we find the frequency in rev/s, given $f = 7200 \text{ rev/min}$:

$$f = \frac{(7200 \text{ rev/min})}{(60 \text{ s/min})} = 120 \text{ rev/s} = 120 \text{ Hz}.$$

Then the angular velocity is

$$\omega = 2\pi f = 754 \text{ rad/s}.$$

(b) The linear speed of a point 3.00 cm out from the axis is given by Eq. 8-4:

$$v = r\omega = (3.00 \times 10^{-2} \text{ m})(754 \text{ rad/s}) = 22.6 \text{ m/s}.$$

(c) Each bit requires $0.50 \times 10^{-6} \text{ m}$, so at a speed of 22.6 m/s, the number of bits passing the head per second is

$$\frac{22.6 \text{ m/s}}{0.50 \times 10^{-6} \text{ m/bit}} = 45 \times 10^6 \text{ bits per second,}$$

or 45 megabits/s (Mbps).

8-2 Constant Angular Acceleration

In Chapter 2, we derived the useful kinematic equations (Eqs. 2-11) that relate acceleration, velocity, distance, and time for the special case of uniform linear acceleration. Those equations were derived from the definitions of linear velocity and acceleration, assuming constant acceleration. The definitions of angular velocity and angular acceleration are the same as those for their linear counterparts, except that θ has replaced the linear displacement x , ω has replaced v , and α has replaced a . Therefore, the angular equations for **constant angular acceleration** will be analogous to Eqs. 2-11 with x replaced by θ , v by ω , and a by α , and they can be derived in exactly the same way. We summarize them here, opposite their linear equivalents (we've chosen $x_0 = 0$, and $\theta_0 = 0$ at the initial time $t = 0$):

Angular	Linear		
$\omega = \omega_0 + \alpha t$	$v = v_0 + at$	[constant α, a]	(8-9a) <i>Kinematic equations</i>
$\theta = \omega_0 t + \frac{1}{2}\alpha t^2$	$x = v_0 t + \frac{1}{2}at^2$	[constant α, a]	(8-9b) <i>for constant</i>
$\omega^2 = \omega_0^2 + 2\alpha\theta$	$v^2 = v_0^2 + 2ax$	[constant α, a]	(8-9c) <i>angular acceleration</i>
$\bar{\omega} = \frac{\omega + \omega_0}{2}$	$\bar{v} = \frac{v + v_0}{2}$	[constant α, a]	(8-9d) ($x_0 = 0, \theta_0 = 0$)

Note that ω_0 represents the angular velocity at $t = 0$, whereas θ and ω represent the angular position and velocity, respectively, at time t . Since the angular acceleration is constant, $\alpha = \bar{\alpha}$.

EXAMPLE 8-6 Centrifuge acceleration. A centrifuge rotor is accelerated from rest to 20,000 rpm in 30 s. (a) What is its average angular acceleration? (b) Through how many revolutions has the centrifuge rotor turned during its acceleration period, assuming constant angular acceleration?

APPROACH To determine $\bar{\alpha} = \Delta\omega/\Delta t$, we need the initial and final angular velocities. For (b), we use Eqs. 8-9 (recall that one revolution corresponds to $\theta = 2\pi$ rad).

SOLUTION (a) The initial angular velocity is $\omega = 0$. The final angular velocity is

$$\omega = 2\pi f = (2\pi \text{ rad/rev}) \frac{(20,000 \text{ rev/min})}{(60 \text{ s/min})} = 2100 \text{ rad/s.}$$

Then, since $\bar{\alpha} = \Delta\omega/\Delta t$ and $\Delta t = 30$ s, we have

$$\bar{\alpha} = \frac{\omega - \omega_0}{\Delta t} = \frac{2100 \text{ rad/s} - 0}{30 \text{ s}} = 70 \text{ rad/s}^2.$$

That is, every second the rotor's angular velocity increases by 70 rad/s, or by $(70/2\pi) = 11$ revolutions per second.

(b) To find θ we could use either Eq. 8-9b or 8-9c, or both to check our answer. The former gives

$$\theta = 0 + \frac{1}{2}(70 \text{ rad/s}^2)(30 \text{ s})^2 = 3.15 \times 10^4 \text{ rad,}$$

where we have kept an extra digit because this is an intermediate result. To find the total number of revolutions, we divide by 2π rad/rev and obtain

$$\frac{3.15 \times 10^4 \text{ rad}}{2\pi \text{ rad/rev}} = 5.0 \times 10^3 \text{ rev.}$$

NOTE Let us calculate θ using Eq. 8-9c:

$$\theta = \frac{\omega^2 - \omega_0^2}{2\alpha} = \frac{(2100 \text{ rad/s})^2 - 0}{2(70 \text{ rad/s}^2)} = 3.15 \times 10^4 \text{ rad}$$

which checks our answer perfectly.

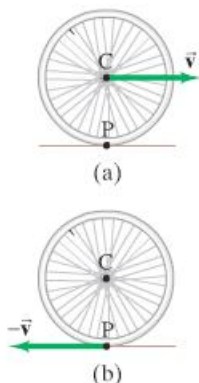


FIGURE 8-8 (a) A wheel rolling to the right. Its center C moves with velocity \vec{v} . Point P is at rest at this instant. (b) The same wheel as seen from a reference frame in which the axle of the wheel C is at rest—that is, we are moving to the right with velocity \vec{v} relative to the ground. Point P , which was at rest in (a), here in (b) is moving to the left with velocity $-\vec{v}$ as shown. (See also Section 3-8 on relative velocity.)

8-3 Rolling Motion (Without Slipping)

The rolling motion of a ball or wheel is familiar in everyday life: a ball rolling across the floor, or the wheels and tires of a car or bicycle rolling along the pavement. Rolling *without slipping* is readily analyzed and depends on static friction between the rolling object and the ground. The friction is static because the rolling object's point of contact with the ground is at rest at each moment.

Rolling without slipping involves both rotation and translation. There is then a simple relation between the linear speed v of the axle and the angular velocity ω of the rotating wheel or sphere: namely, $v = r\omega$ (where r is the radius) as we now show. Figure 8-8a shows a wheel rolling to the right without slipping. At the moment shown, point P on the wheel is in contact with the ground and is momentarily at rest. The velocity of the axle at the wheel's center C is \vec{v} . In Fig. 8-8b we have put ourselves in the reference frame of the wheel—that is, we are moving to the right with velocity \vec{v} relative to the ground. In this reference frame the axle C is at rest, whereas the ground and point P are moving to the left with velocity $-\vec{v}$ as shown. Here we are seeing pure rotation. So we can use Eq. 8-4 to obtain $v = r\omega$, where r is the radius of the wheel. This is the same v as in Fig. 8-8a, so we see that the linear speed v of the axle relative to the ground is related to the angular velocity ω by

$$v = r\omega. \quad \text{[rolling without slipping]}$$

This relationship is valid only if there is no slipping.

EXAMPLE 8-7 Bicycle. A bicycle slows down uniformly from $v_0 = 8.40$ m/s to rest over a distance of 115 m, Fig. 8-9. Each wheel and tire has an overall diameter of 68.0 cm. Determine (a) the angular velocity of the wheels at the initial instant ($t = 0$); (b) the total number of revolutions each wheel rotates before coming to rest; (c) the angular acceleration of the wheel; and (d) the time it took to come to a stop.

APPROACH We assume the bicycle wheels roll without slipping and the tire is in firm contact with the ground. The speed of the bike v and the angular velocity of the wheels ω are related by $v = r\omega$. The bike slows down uniformly, so the angular acceleration is constant and we can use Eqs. 8-9.

SOLUTION (a) The initial angular velocity of the wheel, whose radius is 34.0 cm, is

$$\omega_0 = \frac{v_0}{r} = \frac{8.40 \text{ m/s}}{0.340 \text{ m}} = 24.7 \text{ rad/s.}$$

(b) In coming to a stop, the bike passes over 115 m of ground. The circumference of the wheel is $2\pi r$, so each revolution of the wheel corresponds to a distance traveled of $2\pi r = (2\pi)(0.340 \text{ m})$. Thus the number of revolutions the wheel makes in coming to a stop is

$$\frac{115 \text{ m}}{2\pi r} = \frac{115 \text{ m}}{(2\pi)(0.340 \text{ m})} = 53.8 \text{ rev.}$$

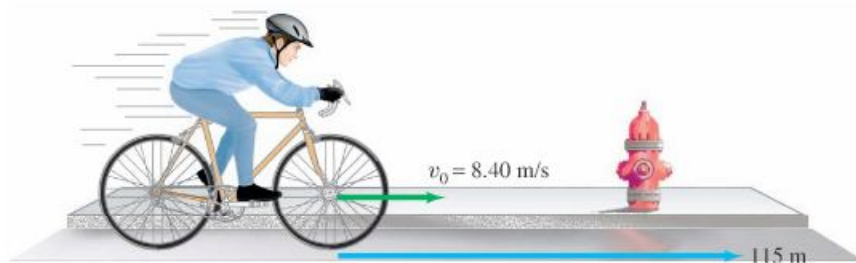


FIGURE 8-9 Example 8-7.

Bike as seen from the ground at $t = 0$

(c) The angular acceleration of the wheel can be obtained from Eq. 8–9c, for which we set $\omega = 0$ and $\omega_0 = 24.7 \text{ rad/s}$. Because each revolution corresponds to 2π radians of angle, then $\theta = 2\pi \text{ rad/rev} \times 53.8 \text{ rev} (= 338 \text{ rad})$ and

$$\alpha = \frac{\omega^2 - \omega_0^2}{2\theta} = \frac{0 - (24.7 \text{ rad/s})^2}{2(2\pi \text{ rad/rev})(53.8 \text{ rev})} = -0.902 \text{ rad/s}^2.$$

(d) Equation 8–9a or b allows us to solve for the time. The first is easier:

$$t = \frac{\omega - \omega_0}{\alpha} = \frac{0 - 24.7 \text{ rad/s}}{-0.902 \text{ rad/s}^2} = 27.4 \text{ s}.$$

NOTE When the bike tire completes one revolution, the bike advances linearly a distance equal to the outer circumference ($2\pi r$) of the tire, as long as there is no slipping or sliding.

8–4 Torque

We have so far discussed rotational kinematics—the description of rotational motion in terms of angle, angular velocity, and angular acceleration. Now we discuss the dynamics, or causes, of rotational motion. Just as we found analogies between linear and rotational motion for the description of motion, so rotational equivalents for dynamics exist as well.

To make an object start rotating about an axis clearly requires a force. But the direction of this force, and where it is applied, are also important. Take, for example, an ordinary situation such as the overhead view of the door in Fig. 8–10. If you apply a force \vec{F}_A to the door as shown, you will find that the greater the magnitude, F_A , the more quickly the door opens. But now if you apply the same magnitude force at a point closer to the hinge—say, \vec{F}_B in Fig. 8–10—the door will not open so quickly. The effect of the force is less: where the force acts, as well as its magnitude and direction, affects how quickly the door opens. Indeed, if only this one force acts, the angular acceleration of the door is proportional not only to the magnitude of the force, but is also directly proportional to *the perpendicular distance from the axis of rotation to the line along which the force acts*. This distance is called the **lever arm**, or **moment arm**, of the force, and is labeled r_A and r_B for the two forces in Fig. 8–10. Thus, if r_A in Fig. 8–10 is three times larger than r_B , then the angular acceleration of the door will be three times as great, assuming that the magnitudes of the forces are the same. To say it another way, if $r_A = 3r_B$, then F_B must be three times as large as F_A to give the same angular acceleration. (Figure 8–11 shows two examples of tools whose long lever arms are very effective.)




FIGURE 8–10 Applying the same force with different lever arms, r_A and r_B . If $r_A = 3r_B$, then to create the same effect (angular acceleration), F_B needs to be three times F_A , or $F_A = \frac{1}{3}F_B$.

Lever arm

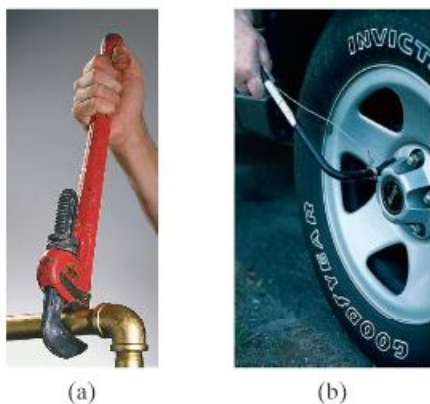


FIGURE 8–11 (a) A plumber can exert greater torque using a wrench with a long lever arm. (b) A tire iron too can have a long lever arm.

Torque defined


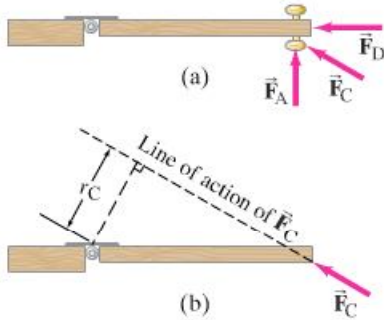


FIGURE 8-12 (a) Forces acting at different angles at the doorknob. (b) The lever arm is defined as the perpendicular distance from the axis of rotation (the hinge) to the line of action of the force.

FIGURE 8-13
Torque = $r_{\perp}F = rF_{\perp}$.

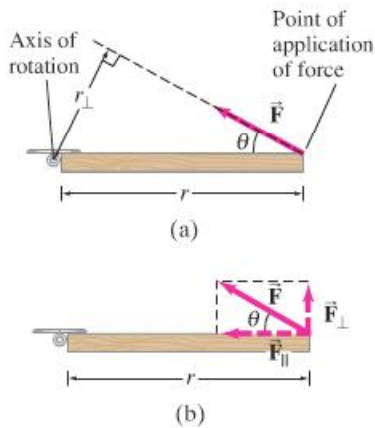

Magnitude of a torque

The angular acceleration, then, is proportional to the product of the *force times the lever arm*. This product is called the *moment of the force* about the axis, or, more commonly, it is called the **torque**, and is represented by τ (Greek lowercase letter tau). Thus, the angular acceleration α of an object is directly proportional to the net applied torque τ :

$$\alpha \propto \tau,$$

and we see that it is torque that gives rise to angular acceleration. This is the rotational analog of Newton's second law for linear motion, $a \propto F$.

We defined the lever arm as the *perpendicular* distance from the axis of rotation to the line of action of the force—that is, the distance which is perpendicular both to the axis of rotation and to an imaginary line drawn along the direction of the force. We do this to take into account the effect of forces acting at an angle. It is clear that a force applied at an angle, such as \vec{F}_C in Fig. 8-12, will be less effective than the same magnitude force applied perpendicular to the door, such as \vec{F}_A (Fig. 8-12a). And if you push on the end of the door so that the force is directed at the hinge (the axis of rotation), as indicated by \vec{F}_D , the door will not rotate at all.

The lever arm for a force such as \vec{F}_C is found by drawing a line along the direction of \vec{F}_C (this is the “line of action” of \vec{F}_C). Then we draw another line, perpendicular to this line of action, that goes to the axis of rotation and is perpendicular also to it. The length of this second line is the lever arm for \vec{F}_C and is labeled r_C in Fig. 8-12b. The lever arm is perpendicular both to the line of action of the force and, at its other end, perpendicular to the rotation axis.

The magnitude of the torque associated with \vec{F}_C is then $r_C F_C$. This short lever arm r_C and the corresponding smaller torque associated with \vec{F}_C is consistent with the observation that \vec{F}_C is less effective in accelerating the door than is \vec{F}_A . When the lever arm is defined in this way, experiment shows that the relation $\alpha \propto \tau$ is valid in general. Notice in Fig. 8-12 that the line of action of the force \vec{F}_D passes through the hinge, and hence its lever arm is zero. Consequently, zero torque is associated with \vec{F}_D and it gives rise to no angular acceleration, in accord with everyday experience.

In general, then, we can write the magnitude of the torque about a given axis as

$$\tau = r_{\perp}F, \quad (8-10a)$$

where r_{\perp} is the lever arm, and the perpendicular symbol (\perp) reminds us that we must use the distance from the axis of rotation that is perpendicular to the line of action of the force (Fig. 8-13a).

An equivalent way of determining the torque associated with a force is to resolve the force into components parallel and perpendicular to the line that connects the axis to the point of application of the force, as shown in Fig. 8-13b. The component F_{\parallel} exerts no torque since it is directed at the rotation axis (its moment arm is zero). Hence the torque will be equal to F_{\perp} times the distance r from the axis to the point of application of the force:

$$\tau = rF_{\perp}. \quad (8-10b)$$

That this gives the same result as Eq. 8-10a can be seen from the relations $F_{\perp} = F \sin \theta$ and $r_{\perp} = r \sin \theta$. [Note that θ is the angle between the directions of \vec{F} and r (radial line from the axis to the point where \vec{F} acts)]. So

$$\tau = rF \sin \theta \quad (8-10c)$$

in either case. We can use any of Eqs. 8-10 to calculate the torque, whichever is easiest.

Since torque is a distance times a force, it is measured in units of $\text{m} \cdot \text{N}$ in SI units,[†] $\text{cm} \cdot \text{dyne}$ in the cgs system, and $\text{ft} \cdot \text{lb}$ in the English system.

[†]Note that the units for torque are the same as those for energy. We write the unit for torque here as $\text{m} \cdot \text{N}$ (in SI) to distinguish it from energy ($\text{N} \cdot \text{m}$) because the two quantities are very different. An obvious difference is that energy is a scalar, whereas torque has a direction and is a vector. The special name *joule* ($1 \text{ J} = 1 \text{ N} \cdot \text{m}$) is used only for energy (and for work), *never* for torque.

EXAMPLE 8-8 Biceps torque. The biceps muscle exerts a vertical force on the lower arm, bent as shown in Figs. 8-14a and b. For each case, calculate the torque about the axis of rotation through the elbow joint, assuming the muscle is attached 5.0 cm from the elbow as shown.

APPROACH The force is given, and the lever arm in (a) is given. In (b) we have to take into account the angle to get the lever arm.

SOLUTION (a) $F = 700 \text{ N}$ and $r_{\perp} = 0.050 \text{ m}$, so

$$\tau = r_{\perp} F = (0.050 \text{ m})(700 \text{ N}) = 35 \text{ m} \cdot \text{N}.$$

(b) Because the arm is at an angle below the horizontal, the lever arm is shorter (Fig. 8-14c) than in part (a): $r_{\perp} = (0.050 \text{ m})(\sin 60^{\circ})$, where $\theta = 60^{\circ}$ is the angle between \vec{F} and r . F is still 700 N, so

$$\tau = (0.050 \text{ m})(0.866)(700 \text{ N}) = 30 \text{ m} \cdot \text{N}.$$

The arm can exert less torque at this angle than when it is at 90° . Weight machines at gyms are often designed to take this variation with angle into account.

NOTE In (b), we could instead have used $\tau = rF_{\perp}$. As shown in Fig. 8-14d, $F_{\perp} = F \sin 60^{\circ}$. Then $\tau = rF_{\perp} = rF \sin \theta = (0.050 \text{ m})(700 \text{ N})(0.866)$ gives the same result.

EXERCISE B Two forces ($F_B = 20 \text{ N}$ and $F_A = 30 \text{ N}$) are applied to a meter stick which can rotate about its left end, Fig. 8-15. Force \vec{F}_B is applied perpendicularly at the midpoint. Which force exerts the greater torque?




FIGURE 8-15 Exercise B.

When more than one torque acts on an object, the angular acceleration α is found to be proportional to the *net* torque. If all the torques acting on an object tend to rotate it in the same direction about a fixed axis of rotation, the net torque is the sum of the torques. But if, say, one torque acts to rotate an object in one direction, and a second torque acts to rotate the object in the opposite direction (as in Fig. 8-16), the net torque is the difference of the two torques. We normally assign a positive sign to torques that act to rotate the object counterclockwise, and a negative sign to torques that act to rotate the object clockwise.

EXAMPLE 8-9 Torque on a compound wheel. Two thin disk-shaped wheels, of radii $r_A = 30 \text{ cm}$ and $r_B = 50 \text{ cm}$, are attached to each other on an axle that passes through the center of each, as shown in Fig. 8-16. Calculate the net torque on this compound wheel due to the two forces shown, each of magnitude 50 N.

APPROACH The force \vec{F}_A acts to rotate the system counterclockwise, whereas \vec{F}_B acts to rotate it clockwise. So the two forces act in opposition to each other. We must choose one direction of rotation to be positive—say, counterclockwise. Then \vec{F}_A exerts a positive torque, $\tau_A = r_A F_A$, since the lever arm is r_A . \vec{F}_B , on the other hand, produces a negative (clockwise) torque and does not act perpendicular to r_B , so we must use its perpendicular component to calculate the torque it produces: $\tau_B = -r_B F_{B\perp} = -r_B F_B \sin \theta$, where $\theta = 60^{\circ}$. (Note that θ must be the angle between \vec{F}_B and a radial line from the axis.)

SOLUTION The net torque is

$$\begin{aligned} \tau &= r_A F_A - r_B F_B \sin 60^{\circ} \\ &= (0.30 \text{ m})(50 \text{ N}) - (0.50 \text{ m})(50 \text{ N})(0.866) = -6.7 \text{ m} \cdot \text{N}. \end{aligned}$$

This net torque acts to accelerate the rotation of the wheel in the clockwise direction.

NOTE The two forces have the same magnitude, yet they produce a net torque because their lever arms are different.

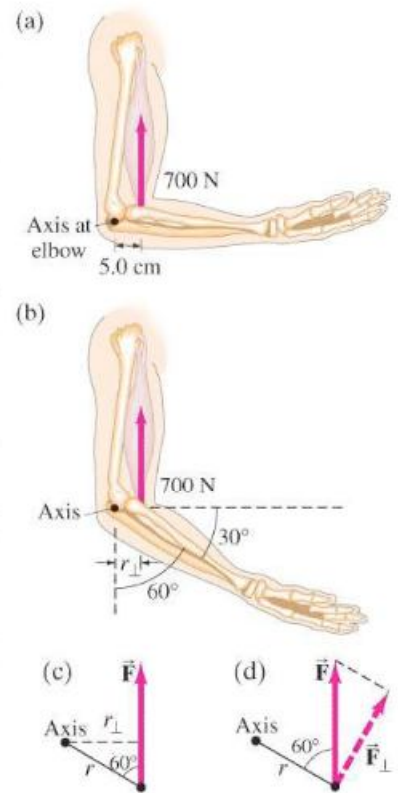
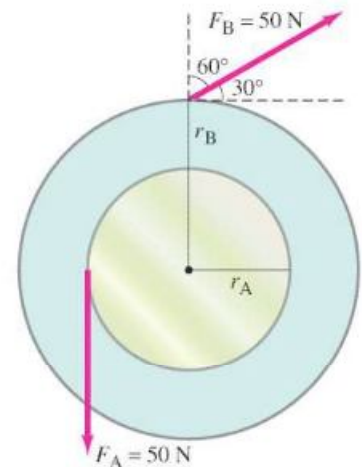


FIGURE 8-14 Example 8-8.

FIGURE 8-16 Example 8-9. The torque due to \vec{F}_A tends to accelerate the wheel counterclockwise, whereas the torque due to \vec{F}_B tends to accelerate the wheel clockwise.






FIGURE 8-17 Only the component of \vec{F} that acts in the plane perpendicular to the rotation axis, \vec{F}_\perp , acts to turn the wheel about the axis. The component parallel to the axis, \vec{F}_\parallel , would tend to move the axis itself, which we assume is held fixed.

* Forces that Act to Tilt the Axis

We are considering only rotation about a fixed axis, and so we consider only forces that act in a plane perpendicular to the axis of rotation. If there is a force (or component of a force) acting parallel to the axis of rotation, it will tend to tilt the axis of rotation—the component \vec{F}_\parallel in Fig. 8-17 is an example. Since we are assuming the axis remains fixed in direction, either there can be no such forces or else the axis must be mounted in bearings or hinges that hold the axis fixed. Thus, only a force, or component of a force (\vec{F}_\perp in Fig. 8-17), in a plane perpendicular to the axis will give rise to rotation about the axis, and it is only these that we consider.

8-5 Rotational Dynamics; Torque and Rotational Inertia

We have discussed that the angular acceleration α of a rotating object is proportional to the net torque τ applied to it:

$$\alpha \propto \Sigma\tau,$$

where we write $\Sigma\tau$ to remind us[†] that it is the *net* torque (sum of all torques acting on the object) that is proportional to α . This corresponds to Newton's second law for translational motion, $a \propto \Sigma F$, but here torque has taken the place of force, and, correspondingly, the angular acceleration α takes the place of the linear acceleration a . In the linear case, the acceleration is not only proportional to the net force, but it is also inversely proportional to the inertia of the object, which we call its mass, m . Thus we could write $a = \Sigma F/m$. But what plays the role of mass for the rotational case? That is what we now set out to determine. At the same time, we will see that the relation $\alpha \propto \Sigma\tau$ follows directly from Newton's second law, $\Sigma F = ma$.

We first consider a very simple case: a particle of mass m rotating in a circle of radius r at the end of a string or rod whose mass we can ignore compared to m (Fig. 8-18), and we assume a single force F acts on m as shown. The torque that gives rise to the angular acceleration is $\tau = rF$. If we use Newton's second law for linear quantities, $\Sigma F = ma$, and Eq. 8-5 relating the angular acceleration to the tangential linear acceleration, $a_{\text{tan}} = r\alpha$, then we have

$$\begin{aligned} F &= ma \\ &= mr\alpha. \end{aligned}$$

When we multiply both sides of this equation by r , we find that the torque $\tau = rF$ is given by

$$\tau = mr^2\alpha. \quad \text{[single particle] (8-11)}$$

Here at last we have a direct relation between the angular acceleration and the applied torque τ . The quantity mr^2 represents the *rotational inertia* of the particle and is called its *moment of inertia*.


Now let us consider a rotating rigid object, such as a wheel rotating about an axis through its center, which could be an axle. We can think of the wheel as consisting of many particles located at various distances from the axis of rotation. We can apply Eq. 8-11 to each particle of the object, and then sum over all the particles. The sum of the various torques is just the total torque, $\Sigma\tau$, so we obtain:

$$\Sigma\tau = (\Sigma mr^2)\alpha \quad \text{(8-12)}$$

where we factored out α because it is the same for all the particles of the object. The sum Σmr^2 represents the sum of the masses of each particle in the object multiplied by the square of the distance of that particle from the axis of

[†] Recall from Chapter 4 that Σ (Greek letter sigma) means "sum of."

FIGURE 8-18 A mass m rotating in a circle of radius r about a fixed point.



rotation. If we assign each particle a number (1, 2, 3, ...), then $\Sigma mr^2 = m_1 r_1^2 + m_2 r_2^2 + m_3 r_3^2 + \dots$. This quantity is called the **moment of inertia** (or *rotational inertia*) I of the object:

$$I = \Sigma mr^2 = m_1 r_1^2 + m_2 r_2^2 + \dots \quad (8-13) \quad \text{Moment of inertia}$$

Combining Eqs. 8-12 and 8-13, we can write

$$\Sigma \tau = I\alpha. \quad (8-14)$$

NEWTON'S SECOND LAW FOR ROTATION

This is the rotational equivalent of Newton's second law. It is valid for the rotation of a rigid object about a fixed axis.[†]

We see that the moment of inertia, I , which is a measure of the rotational inertia of an object, plays the same role for rotational motion that mass does for translational motion. As can be seen from Eq. 8-13, the rotational inertia of an object depends not only on its mass, but also on how that mass is distributed with respect to the axis. For example, a large-diameter cylinder will have greater rotational inertia than one of equal mass but smaller diameter (and therefore greater length), Fig. 8-19. The former will be harder to start rotating, and harder to stop. When the mass is concentrated farther from the axis of rotation, the rotational inertia is greater. For rotational motion, the mass of an object *cannot* be considered as concentrated at its center of mass.

CAUTION
Mass can not be considered concentrated at CM for rotational motion

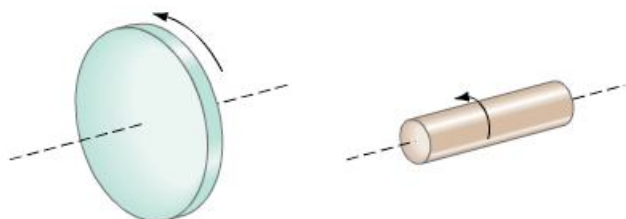


FIGURE 8-19 A large-diameter cylinder has greater rotational inertia than one of smaller diameter but equal mass.

EXAMPLE 8-10 Two weights on a bar: different axis, different I . Two small “weights,” of mass 5.0 kg and 7.0 kg, are mounted 4.0 m apart on a light rod (whose mass can be ignored), as shown in Fig. 8-20. Calculate the moment of inertia of the system (a) when rotated about an axis halfway between the weights, Fig. 8-20a, and (b) when rotated about an axis 0.50 m to the left of the 5.0-kg mass (Fig. 8-20b).

APPROACH In each case, the moment of inertia of the system is found by summing over the two parts using Eq. 8-13.

SOLUTION (a) Both weights are the same distance, 2.0 m, from the axis of rotation. Thus


$$\begin{aligned} I &= \Sigma mr^2 = (5.0 \text{ kg})(2.0 \text{ m})^2 + (7.0 \text{ kg})(2.0 \text{ m})^2 \\ &= 20 \text{ kg} \cdot \text{m}^2 + 28 \text{ kg} \cdot \text{m}^2 = 48 \text{ kg} \cdot \text{m}^2. \end{aligned}$$

(b) The 5.0-kg mass is now 0.50 m from the axis, and the 7.0-kg mass is 4.50 m from the axis. Then

$$\begin{aligned} I &= \Sigma mr^2 = (5.0 \text{ kg})(0.50 \text{ m})^2 + (7.0 \text{ kg})(4.5 \text{ m})^2 \\ &= 1.3 \text{ kg} \cdot \text{m}^2 + 142 \text{ kg} \cdot \text{m}^2 = 143 \text{ kg} \cdot \text{m}^2. \end{aligned}$$

NOTE This Example illustrates two important points. First, the moment of inertia of a given system is different for different axes of rotation. Second, we see in part (b) that mass close to the axis of rotation contributes little to the total moment of inertia; here, the 5.0-kg object contributed less than 1% to the total.









FIGURE 8-20 Example 8-10: calculating the moment of inertia.

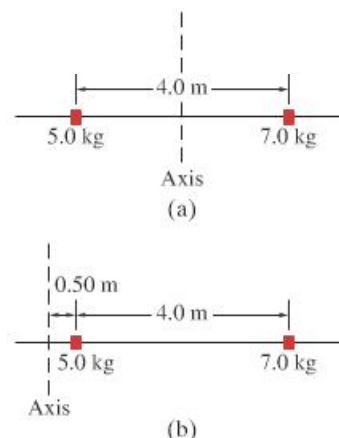

CAUTION
 I depends on axis of rotation and on distribution of mass

[†]Equation 8-14 is also valid when the object is translating with acceleration, as long as I and α are calculated about the center of mass of the object, and the rotation axis through the CM doesn't change direction.

FIGURE 8–21 Moments of inertia for various objects of uniform composition.

Object	Location of axis		Moment of inertia
(a) Thin hoop, radius R	Through center		MR^2
(b) Thin hoop, radius R width W	Through central diameter		$\frac{1}{2}MR^2 + \frac{1}{12}MW^2$
(c) Solid cylinder, radius R	Through center		$\frac{1}{2}MR^2$
(d) Hollow cylinder, inner radius R_1 outer radius R_2	Through center		$\frac{1}{2}M(R_1^2 + R_2^2)$
(e) Uniform sphere, radius R	Through center		$\frac{2}{5}MR^2$
(f) Long uniform rod, length L	Through center		$\frac{1}{12}ML^2$
(g) Long uniform rod, length L	Through end		$\frac{1}{3}ML^2$
(h) Rectangular thin plate, length L , width W	Through center		$\frac{1}{12}M(L^2 + W^2)$

For most ordinary objects, the mass is distributed continuously, and the calculation of the moment of inertia, $\sum mr^2$, can be difficult. Expressions can, however, be worked out (using calculus) for the moments of inertia of regularly shaped objects in terms of the dimensions of the objects. Figure 8–21 gives these expressions for a number of solids rotated about the axes specified. The only one for which the result is obvious is that for the thin hoop or ring rotated about an axis passing through its center perpendicular to the plane of the hoop (Fig. 8–21a). For this object, all the mass is concentrated at the same distance from the axis, R . Thus $\sum mr^2 = (\sum m)R^2 = MR^2$, where M is the total mass of the hoop.

When calculation is difficult, I can be determined experimentally by measuring the angular acceleration α about a fixed axis due to a known net torque, $\Sigma\tau$, and applying Newton's second law, $I = \Sigma\tau/\alpha$, Eq. 8–14.

8–6 Solving Problems in Rotational Dynamics

When working with torque and angular acceleration (Eq. 8–14), it is important to use a consistent set of units, which in SI is: α in rad/s^2 ; τ in $\text{m}\cdot\text{N}$; and the moment of inertia, I , in $\text{kg}\cdot\text{m}^2$.

PROBLEM SOLVING Rotational Motion

1. As always, draw a clear and complete **diagram**.
2. Choose the object or objects that will be the **system** to be studied.
3. Draw a **free-body diagram** for the object under consideration (or for each object, if more than one), showing only (and all) the forces acting on that object and exactly where they act, so you can determine the torque due to each. Gravity acts at the CG of the object (Section 7–8).
4. Identify the axis of rotation and determine the **torques** about it. Choose positive and negative directions of rotation (counterclockwise and clockwise), and assign the correct sign to each torque.
5. Apply **Newton's second law for rotation**, $\Sigma\tau = I\alpha$. If the moment of inertia is not given, and it is not the unknown sought, you need to determine it first. Use consistent units, which in SI are: α in rad/s^2 ; τ in $\text{m}\cdot\text{N}$; and I in $\text{kg}\cdot\text{m}^2$.
6. Also apply **Newton's second law for translation**, $\Sigma\vec{F} = m\vec{a}$, and **other** laws or principles as needed.
7. **Solve** the resulting equation(s) for the unknown(s).
8. Do a rough **estimate** to determine if your answer is reasonable.

EXAMPLE 8–11 A heavy pulley. A 15.0-N force (represented by \vec{F}_T) is applied to a cord wrapped around a pulley of mass $M = 4.00 \text{ kg}$ and radius $R = 33.0 \text{ cm}$, Fig. 8–22. The pulley accelerates uniformly from rest to an angular speed of 30.0 rad/s in 3.00 s . If there is a frictional torque $\tau_{fr} = 1.10 \text{ m}\cdot\text{N}$ at the axle, determine the moment of inertia of the pulley. The pulley rotates about its center.

APPROACH We follow the steps of the Problem Solving Box explicitly.

SOLUTION

1. **Draw a diagram.** The pulley and the attached cord are shown in Fig. 8–22.
2. **Choose the system:** the pulley.
3. **Draw a free-body diagram.** The force that the cord exerts on the pulley is shown as \vec{F}_T in Fig. 8–22. The friction force is also shown, but we are given only its torque. Two other forces could be included in the diagram: the force of gravity mg down and whatever force keeps the axle in place. They do not contribute to the torque (their lever arms are zero) and so are not shown.
4. **Determine the torques.** The cord exerts a force \vec{F}_T that acts at the edge of the pulley, so its lever arm is R . The torque exerted by the cord equals RF_T and is counterclockwise, which we choose to be positive. The frictional torque is given as $\tau_{fr} = 1.10 \text{ m}\cdot\text{N}$; it opposes the motion and is negative.
5. **Apply Newton's second law for rotation.** The net torque is

$$\begin{aligned}\Sigma\tau &= RF_T - \tau_{fr} \\ &= (0.330 \text{ m})(15.0 \text{ N}) - 1.10 \text{ m}\cdot\text{N} = 3.85 \text{ m}\cdot\text{N}.\end{aligned}$$

The angular acceleration α is found from the given data that it takes 3.0 s to accelerate the pulley from rest to $\omega = 30.0 \text{ rad/s}$:

$$\alpha = \frac{\Delta\omega}{\Delta t} = \frac{30.0 \text{ rad/s} - 0}{3.00 \text{ s}} = 10.0 \text{ rad/s}^2.$$

We can now solve for I in Newton's second law (see step 7).

6. **Other calculations:** None needed.
7. **Solve for unknowns.** We solve for I in Newton's second law for rotation, $\Sigma\tau = I\alpha$, and insert our values for $\Sigma\tau$ and α :

$$I = \frac{\Sigma\tau}{\alpha} = \frac{3.85 \text{ m}\cdot\text{N}}{10.0 \text{ rad/s}^2} = 0.385 \text{ kg}\cdot\text{m}^2.$$

8. **Do a rough estimate.** We can do a rough estimate of the moment of inertia by assuming the pulley is a uniform cylinder and using Fig. 8–21c:

$$I = \frac{1}{2}MR^2 = \frac{1}{2}(4.00 \text{ kg})(0.330 \text{ m})^2 = 0.218 \text{ kg}\cdot\text{m}^2.$$

This is the same order of magnitude as our result, but numerically somewhat less. This makes sense, though, because a pulley is not usually a uniform cylinder but instead has more of its mass concentrated toward the outside edge. Such a pulley would be expected to have a greater moment of inertia than a solid cylinder of equal mass; a thin hoop, Fig. 8–21a, ought to have a greater I than our pulley, and indeed it does: $I = MR^2 = 0.436 \text{ kg}\cdot\text{m}^2$.




FIGURE 8–22 Example 8–11.

Usefulness and power of rough estimates

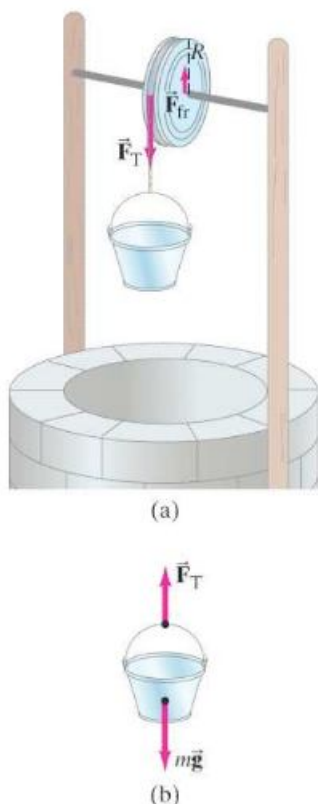


FIGURE 8-23 Example 8-12. (a) Pulley and falling bucket of mass m . (b) Free-body diagram for the bucket.

Additional Example—a bit more challenging

EXAMPLE 8-12 Pulley and bucket. Consider again the pulley in Fig. 8-22 and Example 8-11. But this time, instead of a constant 15.0-N force being exerted on the cord, we now have a bucket of weight $w = 15.0\text{ N}$ (mass $m = w/g = 1.53\text{ kg}$) hanging from the cord. See Fig. 8-23a. We assume the cord has negligible mass and does not stretch or slip on the pulley. Calculate the angular acceleration α of the pulley and the linear acceleration a of the bucket.

APPROACH This situation looks a lot like Example 8-11, Fig. 8-22. But there is a big difference: the tension in the cord is now an unknown, and it is no longer equal to the weight of the bucket if the bucket accelerates. Our system has two parts: the bucket, which can undergo translational motion (Fig. 8-23b is its free-body diagram); and the pulley. The pulley does not translate, but it can rotate. We apply the rotational version of Newton's second law to the pulley, $\Sigma\tau = I\alpha$, and the linear version to the bucket, $\Sigma F = ma$.

SOLUTION Let F_T be the tension in the cord. Then a force F_T acts at the edge of the pulley, and we apply Newton's second law, Eq. 8-14, for the rotation of the pulley:

$$I\alpha = \Sigma\tau = RF_T - \tau_{fr}. \quad [\text{pulley}]$$

Next we look at the (linear) motion of the bucket of mass m . Figure 8-23b, the free-body diagram for the bucket, shows that two forces act on the bucket: the force of gravity mg acts downward, and the tension of the cord F_T pulls upward. Applying Newton's second law, $\Sigma F = ma$, for the bucket, we have (taking downward as positive):

$$mg - F_T = ma. \quad [\text{bucket}]$$

Note that the tension F_T , which is the force exerted on the edge of the pulley, is *not* equal to the weight of the bucket ($= mg = 15.0\text{ N}$). There must be a net force on the bucket if it is accelerating, so $F_T < mg$. We can also see this from the last equation above, $F_T = mg - ma$.

To obtain α , we note that the tangential acceleration of a point on the edge of the pulley is the same as the acceleration of the bucket if the cord doesn't stretch or slip. Hence we can use Eq. 8-5, $a_{\text{tan}} = a = R\alpha$. Substituting $F_T = mg - ma = mg - mR\alpha$ into the first equation above (Newton's second law for rotation of the pulley), we obtain

$$I\alpha = \Sigma\tau = RF_T - \tau_{fr} = R(mg - mR\alpha) - \tau_{fr} = mgR - mR^2\alpha - \tau_{fr}.$$

α appears in the second term on the right, so we bring that term to the left side and solve for α :

$$\alpha = \frac{mgR - \tau_{fr}}{I + mR^2}.$$

The numerator ($mgR - \tau_{fr}$) is the net torque, and the denominator ($I + mR^2$) is the total rotational inertia of the system. Then, since $I = 0.385\text{ kg}\cdot\text{m}^2$, $m = 1.53\text{ kg}$, and $\tau_{fr} = 1.10\text{ m}\cdot\text{N}$ (from Example 8-11),

$$\alpha = \frac{(15.0\text{ N})(0.330\text{ m}) - 1.10\text{ m}\cdot\text{N}}{0.385\text{ kg}\cdot\text{m}^2 + (1.53\text{ kg})(0.330\text{ m})^2} = 6.98\text{ rad/s}^2.$$

The angular acceleration is somewhat less in this case than the 10.0 rad/s^2 of Example 8-11. Why? Because $F_T (= mg - ma)$ is less than the 15.0-N weight of the bucket, mg . The linear acceleration of the bucket is

$$a = R\alpha = (0.330\text{ m})(6.98\text{ rad/s}^2) = 2.30\text{ m/s}^2.$$

NOTE The tension in the cord F_T is less than mg because the bucket accelerates.

8-7 Rotational Kinetic Energy

The quantity $\frac{1}{2}mv^2$ is the kinetic energy of an object undergoing translational motion. An object rotating about an axis is said to have **rotational kinetic energy**. By analogy with translational kinetic energy, we would expect this to be given by the expression $\frac{1}{2}I\omega^2$, where I is the moment of inertia of the object and ω is its angular velocity. We can indeed show that this is true.

Consider any rigid rotating object as made up of many tiny particles, each of mass m . If we let r represent the distance of any one particle from the axis of rotation, then its linear velocity is $v = r\omega$. The total kinetic energy of the whole object will be the sum of the kinetic energies of all its particles:

$$\begin{aligned} \text{KE} &= \Sigma\left(\frac{1}{2}mv^2\right) = \Sigma\left(\frac{1}{2}mr^2\omega^2\right) \\ &= \frac{1}{2}\Sigma(mr^2)\omega^2. \end{aligned}$$

We have factored out the $\frac{1}{2}$ and the ω^2 since they are the same for every particle of a rigid object. Since $\Sigma mr^2 = I$, the moment of inertia, we see that the kinetic energy of a rigid rotating object is, as expected,

$$\text{rotational KE} = \frac{1}{2}I\omega^2. \quad (8-15) \quad \text{Rotational KE}$$

The units are joules, as with all other forms of energy.

An object that rotates while its center of mass (CM) undergoes translational motion will have both translational and rotational kinetic energies. Equation 8-15 gives the rotational kinetic energy if the rotation axis is fixed. If the object is moving (such as a wheel rolling down a hill), this equation is still valid as long as the rotation axis is fixed in direction. Then the total kinetic energy is

$$\text{KE} = \frac{1}{2}Mv_{\text{CM}}^2 + \frac{1}{2}I_{\text{CM}}\omega^2, \quad (8-16) \quad \text{Total KE (translation + rotation)}$$

where v_{CM} is the linear velocity of the center of mass, I_{CM} is the moment of inertia about an axis through the center of mass, ω is the angular velocity about this axis, and M is the total mass of the object.

EXAMPLE 8-13 Sphere rolling down an incline. What will be the speed of a solid sphere of mass M and radius R when it reaches the bottom of an incline if it starts from rest at a vertical height H and rolls without slipping? See Fig. 8-24. (Assume plenty of static friction, which does no work, so no slipping takes place.) Compare your result to that for an object *sliding* down a frictionless incline.

APPROACH We use the law of conservation of energy with gravitational potential energy, now including rotational kinetic energy as well as translational KE.

SOLUTION The total energy at any point a vertical distance y above the base of the incline is

$$\frac{1}{2}Mv^2 + \frac{1}{2}I_{\text{CM}}\omega^2 + Mgy,$$

where v is the speed of the center of mass, and Mgy is the gravitational PE. Applying conservation of energy, we equate the total energy at the top ($y = H$, $v = 0$, $\omega = 0$) to the total energy at the bottom ($y = 0$):

$$0 + 0 + MgH = \frac{1}{2}Mv^2 + \frac{1}{2}I_{\text{CM}}\omega^2 + 0.$$

The moment of inertia of a solid sphere about an axis through its center of mass is $I_{\text{CM}} = \frac{2}{5}MR^2$, Fig. 8-21e. Since the sphere rolls without slipping, we have $\omega = v/R$ (recall Fig. 8-8). Hence

$$MgH = \frac{1}{2}Mv^2 + \frac{1}{2}\left(\frac{2}{5}MR^2\right)\left(\frac{v^2}{R^2}\right).$$

Canceling the M 's and R 's, we obtain

$$\left(\frac{1}{2} + \frac{1}{5}\right)v^2 = gH$$

or

$$v = \sqrt{\frac{10}{7}gH}.$$

We can compare this result for the speed of a rolling sphere to that for an object sliding down a plane without rotating and without friction, $\frac{1}{2}mv^2 = mgH$ (see our energy equation above, removing the rotational term). Then $v = \sqrt{2gH}$, which is greater than our result. An object sliding without friction or rotation transforms its initial potential energy entirely into translational KE (none into rotational KE), so the speed of its center of mass is greater.

NOTE Our result for the rolling sphere shows (perhaps surprisingly) that v is independent of both the mass M and the radius R of the sphere.

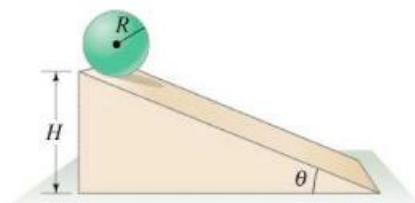


FIGURE 8-24 A sphere rolling down a hill has both translational and rotational kinetic energy. Example 8-13.

PROBLEM SOLVING

Rotational energy adds to other forms of energy to get the total energy which is conserved


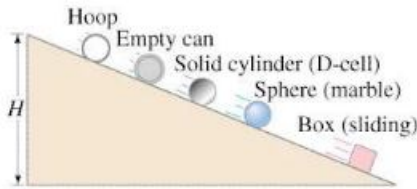


FIGURE 8-25 Example 8-14.

FIGURE 8-26 A sphere rolling to the right on a plane surface. The point in contact with the ground at any moment, point P, is momentarily at rest. Point A to the left of P is moving nearly vertically upward at the instant shown, and point B to the right is moving nearly vertically downward. An instant later, point B will touch the plane and be at rest momentarily. Thus no work is done by the force of static friction.

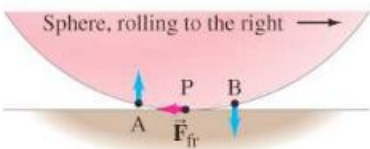

CAUTION
Rolling objects go slower than sliding objects because of rotational KE, not because of friction

CONCEPTUAL EXAMPLE 8-14 **Who's fastest?** Several objects roll without slipping down an incline of vertical height H , all starting from rest at the same moment. The objects are a thin hoop (or a plain wedding band), a spherical marble, a solid cylinder (a D-cell battery), and an empty soup can. In addition, a greased box slides down without friction. In what order do they reach the bottom of the incline?

RESPONSE The sliding box wins because the potential energy loss (MgH) is transformed completely into translational KE for the box, whereas for rolling objects the initial PE is shared between translational and rotational kinetic energies, and so their linear speed is less. For each of the rolling objects we can state that the loss in potential energy equals the increase in kinetic energy:

$$MgH = \frac{1}{2}Mv^2 + \frac{1}{2}I_{CM}\omega^2.$$

For all our rolling objects, the moment of inertia I_{CM} is a numerical factor times the mass M and the radius R^2 (Fig. 8-21). The mass M is in each term, so the translational speed v doesn't depend on M ; nor does it depend on the radius R since $\omega = v/R$, so R^2 cancels out for all the rolling objects, just as in Example 8-13. Thus the speed v at the bottom depends only on that numerical factor in I_{CM} which expresses how the mass is distributed. The hoop, with all its mass concentrated at radius R ($I_{CM} = MR^2$), has the largest moment of inertia; hence it will have the lowest speed and will arrive at the bottom behind the D-cell ($I_{CM} = \frac{1}{2}MR^2$), which in turn will be behind the marble ($I_{CM} = \frac{2}{5}MR^2$). The empty can, which is mainly a hoop plus a small disk, has most of its mass concentrated at R ; so it will be a bit faster than the pure hoop but slower than the D-cell. See Fig. 8-25.

NOTE As in Example 8-13, the speed at the bottom does not depend on the object's mass M or radius R , but only on its shape (and the height of the hill H).

If there had been little or no static friction between the rolling objects and the plane in these Examples, the round objects would have slid rather than rolled, or a combination of both. Static friction must be present to make a round object roll. We did not need to take friction into account in the energy equation because it is *static* friction and does no work—the point of contact of the sphere at each instant does not slide, but moves perpendicular to the plane (first down and then up as shown in Fig. 8-26) as the sphere rolls. Thus, no work is done by the static friction force because the force and the motion (displacement) are perpendicular. The reason the rolling objects in Examples 8-13 and 8-14 move down the slope more slowly than if they were sliding is *not* because friction is doing work. Rather, it is because some of the gravitational PE is converted to rotational KE, leaving less for the translational KE.

Work Done by Torque

The work done on an object rotating about a fixed axis, such as the pulleys in Figs. 8-22 and 8-23, can be written using angular quantities. As shown in Fig. 8-27, a force F exerting a torque $\tau = rF$ on a wheel does work $W = F\Delta l$ in rotating the wheel a small distance Δl at the point of application of \vec{F} .




FIGURE 8-27 Torque $\tau = rF$ does work when rotating a wheel equal to $W = F\Delta l = Fr\Delta\theta = \tau\Delta\theta$.

The wheel has rotated through a small angle $\Delta\theta = \Delta l/r$ (Eq. 8-1). Hence

$$W = F\Delta l = Fr\Delta\theta.$$

Since $\tau = rF$, then

$$W = \tau\Delta\theta \quad (8-17)$$

Work done by torque

is the work done by the torque τ when rotating the wheel through an angle $\Delta\theta$. Finally, power P is the rate work is done: $P = W/\Delta t = \tau\Delta\theta/\Delta t = \tau\omega$.

8-8 Angular Momentum and Its Conservation

Throughout this Chapter we have seen that if we use the appropriate angular variables, the kinematic and dynamic equations for rotational motion are analogous to those for ordinary linear motion. We saw in the previous Section, for example, that rotational kinetic energy can be written as $\frac{1}{2}I\omega^2$, which is analogous to the translational kinetic energy, $\frac{1}{2}mv^2$. In like manner, the linear momentum, $p = mv$, has a rotational analog. It is called **angular momentum**, L . For an object rotating about a fixed axis, it is defined as

$$L = I\omega, \quad (8-18)$$

Angular momentum

where I is the moment of inertia and ω is the angular velocity about the axis of rotation. The SI units for L are $\text{kg} \cdot \text{m}^2/\text{s}$, which has no special name.

We saw in Chapter 7 (Section 7-1) that Newton's second law can be written not only as $\Sigma F = ma$ but also more generally in terms of momentum (Eq. 7-2), $\Sigma F = \Delta p/\Delta t$. In a similar way, the rotational equivalent of Newton's second law, which we saw in Eq. 8-14 can be written as $\Sigma \tau = I\alpha$, can also be written in terms of angular momentum:

$$\Sigma \tau = \frac{\Delta L}{\Delta t}, \quad (8-19)$$

NEWTON'S SECOND LAW FOR ROTATION

where $\Sigma \tau$ is the net torque acting to rotate the object, and ΔL is the change in angular momentum in a time interval Δt . Equation 8-14, $\Sigma \tau = I\alpha$, is a special case of Eq. 8-19 when the moment of inertia is constant. This can be seen as follows. If an object has angular velocity ω_0 at time $t = 0$, and angular velocity ω after a time interval Δt , then its angular acceleration (Eq. 8-3) is

$$\alpha = \frac{\Delta\omega}{\Delta t} = \frac{\omega - \omega_0}{\Delta t}.$$

Then from Eq. 8-19, we have

$$\Sigma \tau = \frac{\Delta L}{\Delta t} = \frac{I\omega - I\omega_0}{\Delta t} = \frac{I(\omega - \omega_0)}{\Delta t} = I \frac{\Delta\omega}{\Delta t} = I\alpha,$$

which is Eq. 8-14.

Angular momentum is an important concept in physics because, under certain conditions, it is a conserved quantity. We can see from Eq. 8-19 that if the net torque $\Sigma \tau$ on an object is zero, then $\Delta L/\Delta t$ equals zero. That is, L does not change. This is the **law of conservation of angular momentum** for a rotating object:

The total angular momentum of a rotating object remains constant if the net torque acting on it is zero.

CONSERVATION OF ANGULAR MOMENTUM

The law of conservation of angular momentum is one of the great conservation laws of physics, along with energy and linear momentum.

When there is zero net torque acting on an object, and the object is rotating about a fixed axis or about an axis through its center of mass whose direction doesn't change, we can write

$$I\omega = I_0\omega_0 = \text{constant}.$$

I_0 and ω_0 are the moment of inertia and angular velocity, respectively, about that axis at some initial time ($t = 0$), and I and ω are their values at some other time.

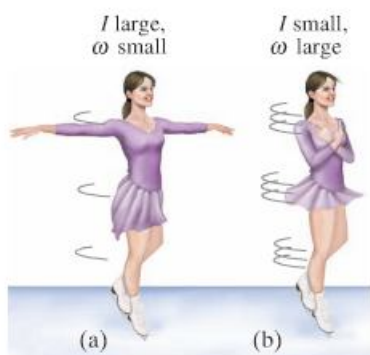



FIGURE 8-28 A skater doing a spin on ice, illustrating conservation of angular momentum. In (a), I is large and ω is small; in (b), I is smaller so ω is larger.

PHYSICS APPLIED
Spins in figure skating and diving

FIGURE 8-29 A diver rotates faster when arms and legs are tucked in than when they are outstretched. Angular momentum is conserved.



FIGURE 8-30 Example 8-15.

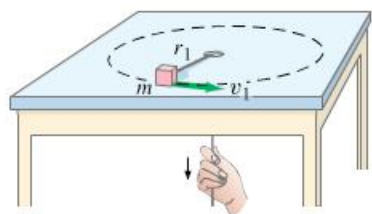

The parts of the object may alter their positions relative to one another, so I changes. But then ω changes as well to ensure that the product $I\omega$ remains constant.

Many interesting phenomena can be understood on the basis of conservation of angular momentum. Consider a skater doing a spin on the tips of her skates, Fig. 8-28. She rotates at a relatively low speed when her arms are outstretched; when she brings her arms in close to her body, she suddenly spins much faster. From the definition of moment of inertia, $I = \sum mr^2$, it is clear that when she pulls her arms in closer to the axis of rotation, r is reduced for the arms, so her moment of inertia is reduced. Since the angular momentum $I\omega$ remains constant (we ignore the small torque due to friction), if I decreases, then the angular velocity ω must increase. If the skater reduces her moment of inertia by a factor of 2, she will then rotate with twice the angular velocity.

EXERCISE C When a spinning figure skater pulls in her arms, her moment of inertia decreases; to conserve angular momentum, her angular velocity increases. Does her rotational kinetic energy also increase? If so, where does the energy come from?

A similar example is the diver shown in Fig. 8-29. The push as she leaves the board gives her an initial angular momentum about her center of mass. When she curls herself into the tuck position, she rotates quickly one or more times. She then stretches out again, increasing her moment of inertia which reduces the angular velocity to a small value, and then she enters the water. The change in moment of inertia from the straight position to the tuck position can be a factor of as much as $3\frac{1}{2}$.

Note that for angular momentum to be conserved, the net torque must be zero, but the net force does not necessarily have to be zero. The net force on the diver in Fig. 8-29, for example, is not zero (gravity is acting), but the net torque on her is zero because the force of gravity acts at her center of mass.

EXAMPLE 8-15 Object rotating on a string of changing length. A small mass m attached to the end of a string revolves in a circle on a frictionless tabletop. The other end of the string passes through a hole in the table (Fig. 8-30). Initially, the mass revolves with a speed $v_1 = 2.4$ m/s in a circle of radius $r_1 = 0.80$ m. The string is then pulled slowly through the hole so that the radius is reduced to $r_2 = 0.48$ m. What is the speed, v_2 , of the mass now?

APPROACH There is no net torque on the mass m because the force exerted by the string to keep it moving in a circle is exerted toward the axis; hence the lever arm is zero. We can thus apply conservation of angular momentum.

SOLUTION Conservation of angular momentum gives

$$I_1\omega_1 = I_2\omega_2.$$

Our small mass is essentially a particle whose moment of inertia about the hole is $I = mr^2$ (Section 8-5, Eq. 8-11), so we have

$$mr_1^2\omega_1 = mr_2^2\omega_2,$$

or

$$\omega_2 = \omega_1 \left(\frac{r_1^2}{r_2^2} \right).$$

Then, since $v = r\omega$, we can write

$$\begin{aligned} v_2 &= r_2\omega_2 = r_2\omega_1 \left(\frac{r_1^2}{r_2^2} \right) = r_2 \frac{v_1}{r_1} \left(\frac{r_1^2}{r_2^2} \right) = v_1 \frac{r_1}{r_2} \\ &= (2.4 \text{ m/s}) \left(\frac{0.80 \text{ m}}{0.48 \text{ m}} \right) = 4.0 \text{ m/s}. \end{aligned}$$

The speed increases as the radius decreases.

EXERCISE D The speed of mass m in Example 8-15 increased, so its kinetic energy increased. Where did the energy come from?

EXAMPLE 8-16 ESTIMATE Star collapse. Astronomers often detect stars that are rotating extremely rapidly, known as neutron stars. These stars are believed to have formed from the inner core of a larger star that collapsed, due to its own gravitation, to a star of very small radius and very high density. Before collapse, suppose the core of such a star is the size of our Sun ($R \approx 7 \times 10^5 \text{ km}$) with mass 2.0 times as great as the Sun, and is rotating at a speed of 1.0 revolution every 10 days. If it were to undergo gravitational collapse to a neutron star of radius 10 km, what would its rotation speed be? Assume the star is a uniform sphere at all times.

APPROACH The star is isolated (no external forces), so we can use conservation of angular momentum for this process.

SOLUTION From conservation of angular momentum,

$$I_1 \omega_1 = I_2 \omega_2$$

where the subscripts 1 and 2 refer to initial (normal star) and final (neutron star), respectively. Then, assuming no mass is lost in the process,

$$\omega_2 = \left(\frac{I_1}{I_2} \right) \omega_1 = \left(\frac{\frac{2}{5} M_1 R_1^2}{\frac{2}{5} M_2 R_2^2} \right) \omega_1 = \frac{R_1^2}{R_2^2} \omega_1.$$

The frequency $f = \omega/2\pi$, so

$$\begin{aligned} f_2 &= \frac{\omega_2}{2\pi} = \frac{R_1^2}{R_2^2} f_1 \\ &= \left(\frac{7 \times 10^5 \text{ km}}{10 \text{ km}} \right)^2 \left(\frac{1.0 \text{ rev}}{10 \text{ d}(24 \text{ h/d})(3600 \text{ s/h})} \right) \approx 6 \times 10^3 \text{ rev/s.} \end{aligned}$$


* 8-9 Vector Nature of Angular Quantities

Up to now we have considered only the magnitudes of angular quantities such as ω , α , and L . But they have a vector aspect too, and now we consider the directions. In fact, we have to *define* the directions for rotational quantities, and we take first the angular velocity, $\vec{\omega}$.

Consider the rotating wheel shown in Fig. 8-31a. The linear velocities of different particles of the wheel point in all different directions. The only unique direction in space associated with the rotation is along the axis of rotation, perpendicular to the actual motion. We therefore choose the axis of rotation to be the direction of the angular velocity vector, $\vec{\omega}$. Actually, there is still an ambiguity since $\vec{\omega}$ could point in either direction along the axis of rotation (up or down in Fig. 8-31a). The convention we use, called **the right-hand rule**, is the following: When the fingers of the right hand are curled around the rotation axis and point in the direction of the rotation, then the thumb points in the direction of $\vec{\omega}$. This is shown in Fig. 8-31b. Note that $\vec{\omega}$ points in the direction a right-handed screw would move when turned in the direction of rotation. Thus, if the rotation of the wheel in Fig. 8-31b is counterclockwise, the direction of $\vec{\omega}$ is upward. If the wheel rotates clockwise, then $\vec{\omega}$ points in the opposite direction, downward. Note that no part of the rotating object moves in the direction of $\vec{\omega}$.

If the axis of rotation is fixed, then $\vec{\omega}$ can change only in magnitude. Thus $\vec{\alpha} = \Delta\vec{\omega}/\Delta t$ must also point along the axis of rotation. If the rotation is counterclockwise as in Fig. 8-31a, and if the magnitude ω is increasing, then $\vec{\alpha}$ points upward; but if ω is decreasing (the wheel is slowing down), $\vec{\alpha}$ points downward. If the rotation is clockwise, $\vec{\alpha}$ will point downward if ω is increasing, and point upward if ω is decreasing.

FIGURE 8-31 (a) Rotating wheel. (b) Right-hand rule for obtaining the direction of $\vec{\omega}$.

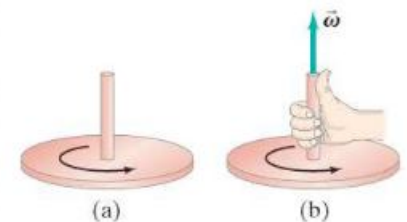


Right-hand rule

Angular momentum, like linear momentum, is a vector quantity. For a symmetrical object rotating about a symmetry axis (such as a wheel, cylinder, hoop, or sphere), we can write the vector angular momentum as

$$\vec{L} = I\vec{\omega}. \quad (8-20)$$

The angular velocity vector $\vec{\omega}$ (and therefore also \vec{L}) points along the axis of rotation in the direction given by the right-hand rule (Fig. 8-31b).

FIGURE 8-32 (a) A person standing on a circular platform, initially at rest, begins walking along the edge at speed v . The platform, assumed to be mounted on friction-free bearings, begins rotating in the opposite direction, so that the total angular momentum remains zero, as shown in (b).

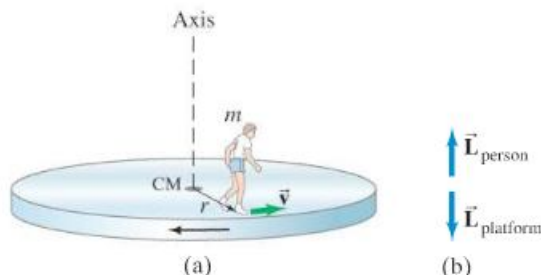

The vector nature of angular momentum can be used to explain a number of interesting (and sometimes surprising) phenomena. For example, consider a person standing at rest on a circular platform capable of rotating without friction about an axis through its center (that is, a simplified merry-go-round). If the person now starts to walk along the edge of the platform, Fig. 8-32a, the platform starts rotating in the opposite direction. Why? One way to look at it is that the person's foot exerts a force on the platform. Another way to look at it (and this is the most useful analysis here) is that this is an example of the conservation of angular momentum. If the person starts walking counter-clockwise, the person's angular momentum will point upward along the axis of rotation (remember how we defined the direction of $\vec{\omega}$ using the right-hand rule). The magnitude of the person's angular momentum will be $L = I\omega = (mr^2)(v/r)$, where v is the person's speed (relative to Earth, not to the platform), r is his distance from the rotation axis, m is his mass, and mr^2 is his moment of inertia if we consider him a particle (mass concentrated at one point). The platform rotates in the opposite direction, so its angular momentum points downward. If the initial total angular momentum of the system (person and platform) was zero (person and platform at rest), it will remain zero after the person starts walking. That is, the upward angular momentum of the person just balances the oppositely directed downward angular momentum of the platform (Fig. 8-32b), so the total vector angular momentum remains zero. Even though the person exerts a force (and torque) on the platform, the platform exerts an equal and opposite torque on the person. So the net torque on the system of person plus platform is zero (ignoring friction), and the total angular momentum remains constant.

FIGURE 8-33 Example 8-17.



CONCEPTUAL EXAMPLE 8-17 **Spinning bicycle wheel.** Your physics teacher is holding a spinning bicycle wheel while he stands on a stationary frictionless turntable (Fig. 8-33). What will happen if the teacher suddenly flips the bicycle wheel over so that it is spinning in the opposite direction?

RESPONSE We consider the system of turntable, teacher, and bicycle wheel. The total angular momentum initially is \vec{L} vertically upward. That is also what the system's angular momentum must be afterward, since \vec{L} is conserved when there is no net torque. Thus, if the wheel's angular momentum after being flipped over is $-\vec{L}$ downward, then the angular momentum of teacher plus turntable will have to be $+2\vec{L}$ upward. We can safely predict that the teacher will begin spinning around in the same direction the wheel was spinning originally.

Summary

When a rigid object rotates about a fixed axis, each point of the object moves in a circular path. Lines drawn perpendicularly from the rotation axis to various points in the object all sweep out the same angle θ in any given time interval.

Angles are conveniently measured in **radians**, where one radian is the angle subtended by an arc whose length is equal to the radius, or

$$\begin{aligned} 2\pi \text{ rad} &= 360^\circ \\ 1 \text{ rad} &\approx 57.3^\circ. \end{aligned}$$

Angular velocity, ω , is defined as the rate of change of angular position:

$$\omega = \frac{\Delta\theta}{\Delta t} \quad (8-2)$$

All parts of a rigid object rotating about a fixed axis have the same angular velocity at any instant.

Angular acceleration, α , is defined as the rate of change of angular velocity:

$$\alpha = \frac{\Delta\omega}{\Delta t} \quad (8-3)$$

The linear velocity v and acceleration a of a point fixed at a distance r from the axis of rotation are related to ω and α by

$$v = r\omega, \quad (8-4)$$

$$a_{\text{tan}} = r\alpha, \quad (8-5)$$

$$a_{\text{R}} = \omega^2 r, \quad (8-6)$$

where a_{tan} and a_{R} are the tangential and radial (centripetal) components of the linear acceleration, respectively.

The frequency f is related to ω by

$$\omega = 2\pi f, \quad (8-7)$$

and to the period T by

$$T = 1/f. \quad (8-8)$$

The equations describing uniformly accelerated rotational motion ($\alpha = \text{constant}$) have the same form as for uniformly accelerated linear motion:

$$\begin{aligned} \omega &= \omega_0 + \alpha t, & \theta &= \omega_0 t + \frac{1}{2}\alpha t^2, \\ \omega^2 &= \omega_0^2 + 2\alpha\theta, & \bar{\omega} &= \frac{\omega + \omega_0}{2}. \end{aligned} \quad (8-9)$$

The dynamics of rotation is analogous to the dynamics of linear motion. Force is replaced by **torque** τ , which is defined as the product of force times lever arm (perpendicular distance from the line of action of the force to the axis of rotation):

$$\tau = rF \sin \theta = r_{\perp} F = rF_{\perp}. \quad (8-10)$$

Mass is replaced by **moment of inertia** I , which depends not only on the mass of the object, but also on how the mass is distributed about the axis of rotation. Linear acceleration is replaced by angular acceleration. The rotational equivalent of Newton's second law is then

$$\Sigma \tau = I\alpha. \quad (8-14)$$

The **rotational kinetic energy** of an object rotating about a fixed axis with angular velocity ω is

$$\text{KE} = \frac{1}{2} I \omega^2. \quad (8-15)$$

For an object both translating and rotating, the total kinetic energy is the sum of the translational kinetic energy of the object's center of mass plus the rotational kinetic energy of the object about its center of mass:

$$\text{KE} = \frac{1}{2} M v_{\text{CM}}^2 + \frac{1}{2} I_{\text{CM}} \omega^2 \quad (8-16)$$

as long as the rotation axis is fixed in direction.

The **angular momentum** L of an object about a fixed rotation axis is given by

$$L = I\omega. \quad (8-18)$$

Newton's second law, in terms of angular momentum, is

$$\Sigma \tau = \frac{\Delta L}{\Delta t}. \quad (8-19)$$

If the net torque on the object is zero, $\Delta L/\Delta t = 0$, so $L = \text{constant}$. This is the **law of conservation of angular momentum** for a rotating object.

The following Table summarizes angular (or rotational) quantities, comparing them to their translational analogs.

Translation	Rotation	Connection
x	θ	$x = r\theta$
v	ω	$v = r\omega$
a	α	$a = r\alpha$
m	I	$I = \Sigma mr^2$
F	τ	$\tau = rF \sin \theta$
$\text{KE} = \frac{1}{2} mv^2$	$\frac{1}{2} I \omega^2$	
$p = mv$	$L = I\omega$	
$W = Fd$	$W = \tau\theta$	
$\Sigma F = ma$	$\Sigma \tau = I\alpha$	
$\Sigma F = \frac{\Delta p}{\Delta t}$	$\Sigma \tau = \frac{\Delta L}{\Delta t}$	

Questions

1. A bicycle odometer (which measures distance traveled) is attached near the wheel hub and is designed for 27-inch wheels. What happens if you use it on a bicycle with 24-inch wheels?
2. Suppose a disk rotates at constant angular velocity. Does a point on the rim have radial and/or tangential acceleration? If the disk's angular velocity increases uniformly,

does the point have radial and/or tangential acceleration? For which cases would the magnitude of either component of linear acceleration change?

3. Could a nonrigid body be described by a single value of the angular velocity ω ? Explain.
4. Can a small force ever exert a greater torque than a larger force? Explain.

5. If a force \vec{F} acts on an object such that its lever arm is zero, does it have any effect on the object's motion? Explain.
6. Why is it more difficult to do a sit-up with your hands behind your head than when your arms are stretched out in front of you? A diagram may help you to answer this.
7. A 21-speed bicycle has seven sprockets at the rear wheel and three at the pedal cranks. In which gear is it harder to pedal, a small rear sprocket or a large rear sprocket? Why? In which gear is it harder to pedal, a small front sprocket or a large front sprocket? Why?
8. Mammals that depend on being able to run fast have slender lower legs with flesh and muscle concentrated high, close to the body (Fig. 8–34). On the basis of rotational dynamics, explain why this distribution of mass is advantageous.



FIGURE 8–34 Question 8. A gazelle.

FIGURE 8–35 Question 9.



9. Why do tightrope walkers (Fig. 8–35) carry a long, narrow beam?
10. If the net force on a system is zero, is the net torque also zero? If the net torque on a system is zero, is the net force zero?
11. Two inclines have the same height but make different angles with the horizontal. The same steel ball is rolled down each incline. On which incline will the speed of the ball at the bottom be greater? Explain.
12. Two solid spheres simultaneously start rolling (from rest) down an incline. One sphere has twice the radius and twice the mass of the other. Which reaches the bottom of the incline first? Which has the greater speed there? Which has the greater total kinetic energy at the bottom?

13. A sphere and a cylinder have the same radius and the same mass. They start from rest at the top of an incline. Which reaches the bottom first? Which has the greater speed at the bottom? Which has the greater total kinetic energy at the bottom? Which has the greater rotational KE?
14. We claim that momentum and angular momentum are conserved. Yet most moving or rotating objects eventually slow down and stop. Explain.
15. If there were a great migration of people toward the Earth's equator, how would this affect the length of the day?
16. Can the diver of Fig. 8–29 do a somersault without having any initial rotation when she leaves the board?
17. The moment of inertia of a rotating solid disk about an axis through its center of mass is $\frac{1}{2}MR^2$ (Fig. 8–21c). Suppose instead that the axis of rotation passes through a point on the edge of the disk. Will the moment of inertia be the same, larger, or smaller?
18. Suppose you are sitting on a rotating stool holding a 2-kg mass in each outstretched hand. If you suddenly drop the masses, will your angular velocity increase, decrease, or stay the same? Explain.
19. Two spheres look identical and have the same mass. However, one is hollow and the other is solid. Describe an experiment to determine which is which.
- * 20. In what direction is the Earth's angular velocity vector as it rotates daily about its axis?
- * 21. The angular velocity of a wheel rotating on a horizontal axle points west. In what direction is the linear velocity of a point on the top of the wheel? If the angular acceleration points east, describe the tangential linear acceleration of this point at the top of the wheel. Is the angular speed increasing or decreasing?
- * 22. Suppose you are standing on the edge of a large freely rotating turntable. What happens if you walk toward the center?
- * 23. A shortstop may leap into the air to catch a ball and throw it quickly. As he throws the ball, the upper part of his body rotates. If you look quickly you will notice that his hips and legs rotate in the opposite direction (Fig. 8–36). Explain.



FIGURE 8–36 Question 23. A shortstop in the air, throwing the ball.

- * 24. On the basis of the law of conservation of angular momentum, discuss why a helicopter must have more than one rotor (or propeller). Discuss one or more ways the second propeller can operate to keep the helicopter stable.

Problems

8-1 Angular Quantities

- (I) Express the following angles in radians: (a) 30° , (b) 57° , (c) 90° , (d) 360° , and (e) 420° . Give as numerical values and as fractions of π .
- (I) Eclipses happen on Earth because of an amazing coincidence. Calculate, using the information inside the Front Cover, the angular diameters (in radians) of the Sun and the Moon, as seen on Earth.
- (I) A laser beam is directed at the Moon, 380,000 km from Earth. The beam diverges at an angle θ (Fig. 8-37) of 1.4×10^{-5} rad. What diameter spot will it make on the Moon?

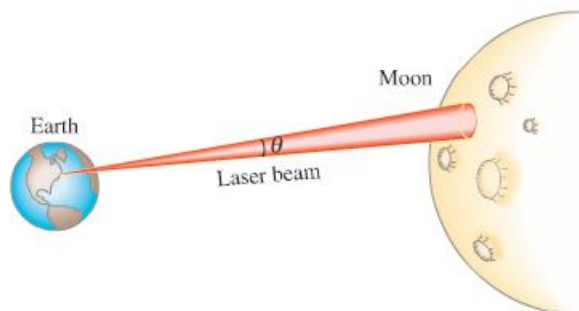


FIGURE 8-37 Problem 3.

- (I) The blades in a blender rotate at a rate of 6500 rpm. When the motor is turned off during operation, the blades slow to rest in 3.0 s. What is the angular acceleration as the blades slow down?
- (II) A child rolls a ball on a level floor 3.5 m to another child. If the ball makes 15.0 revolutions, what is its diameter?
- (II) A bicycle with tires 68 cm in diameter travels 8.0 km. How many revolutions do the wheels make?
- (II) (a) A grinding wheel 0.35 m in diameter rotates at 2500 rpm. Calculate its angular velocity in rad/s. (b) What are the linear speed and acceleration of a point on the edge of the grinding wheel?
- (II) A rotating merry-go-round makes one complete revolution in 4.0 s (Fig. 8-38). (a) What is the linear speed of a child seated 1.2 m from the center? (b) What is her acceleration (give components)?



FIGURE 8-38 Problem 8.

- (II) Calculate the angular velocity of the Earth (a) in its orbit around the Sun, and (b) about its axis.
- (II) What is the linear speed of a point (a) on the equator, (b) on the Arctic Circle (latitude 66.5° N), and (c) at a latitude of 45.0° N, due to the Earth's rotation?
- (II) How fast (in rpm) must a centrifuge rotate if a particle 7.0 cm from the axis of rotation is to experience an acceleration of 100,000 g 's?
- (II) A 70-cm-diameter wheel accelerates uniformly about its center from 130 rpm to 280 rpm in 4.0 s. Determine (a) its angular acceleration, and (b) the radial and tangential components of the linear acceleration of a point on the edge of the wheel 2.0 s after it has started accelerating.
- (II) A turntable of radius R_1 is turned by a circular rubber roller of radius R_2 in contact with it at their outer edges. What is the ratio of their angular velocities, ω_1/ω_2 ?
- (III) In traveling to the Moon, astronauts aboard the *Apollo* spacecraft put themselves into a slow rotation to distribute the Sun's energy evenly. At the start of their trip, they accelerated from no rotation to 1.0 revolution every minute during a 12-min time interval. The spacecraft can be thought of as a cylinder with a diameter of 8.5 m. Determine (a) the angular acceleration, and (b) the radial and tangential components of the linear acceleration of a point on the skin of the ship 5.0 min after it started this acceleration.

8-2 and 8-3 Constant Angular Acceleration; Rolling

- (I) A centrifuge accelerates uniformly from rest to 15,000 rpm in 220 s. Through how many revolutions did it turn in this time?
- (I) An automobile engine slows down from 4500 rpm to 1200 rpm in 2.5 s. Calculate (a) its angular acceleration, assumed constant, and (b) the total number of revolutions the engine makes in this time.
- (I) Pilots can be tested for the stresses of flying high-speed jets in a whirling "human centrifuge," which takes 1.0 min to turn through 20 complete revolutions before reaching its final speed. (a) What was its angular acceleration (assumed constant), and (b) what was its final angular speed in rpm?
- (II) A wheel 33 cm in diameter accelerates uniformly from 240 rpm to 360 rpm in 6.5 s. How far will a point on the edge of the wheel have traveled in this time?
- (II) A cooling fan is turned off when it is running at 850 rev/min. It turns 1500 revolutions before it comes to a stop. (a) What was the fan's angular acceleration, assumed constant? (b) How long did it take the fan to come to a complete stop?
- (II) A small rubber wheel is used to drive a large pottery wheel, and they are mounted so that their circular edges touch. The small wheel has a radius of 2.0 cm and accelerates at the rate of 7.2 rad/s^2 , and it is in contact with the pottery wheel (radius 25.0 cm) without slipping. Calculate (a) the angular acceleration of the pottery wheel, and (b) the time it takes the pottery wheel to reach its required speed of 65 rpm.

21. (II) The tires of a car make 65 revolutions as the car reduces its speed uniformly from 95 km/h to 45 km/h. The tires have a diameter of 0.80 m. (a) What was the angular acceleration of the tires? (b) If the car continues to decelerate at this rate, how much more time is required for it to stop?

8-4 Torque

22. (I) A 55-kg person riding a bike puts all her weight on each pedal when climbing a hill. The pedals rotate in a circle of radius 17 cm. (a) What is the maximum torque she exerts? (b) How could she exert more torque?
23. (I) A person exerts a force of 55 N on the end of a door 74 cm wide. What is the magnitude of the torque if the force is exerted (a) perpendicular to the door, and (b) at a 45° angle to the face of the door?
24. (II) Calculate the net torque about the axle of the wheel shown in Fig. 8-39. Assume that a friction torque of $0.40 \text{ m}\cdot\text{N}$ opposes the motion.




FIGURE 8-39
Problem 24.

25. (II) Two blocks, each of mass m , are attached to the ends of a massless rod which pivots as shown in Fig. 8-40. Initially the rod is held in the horizontal position and then released. Calculate the magnitude and direction of the net torque on this system.



FIGURE 8-40 Problem 25.

26. (II) The bolts on the cylinder head of an engine require tightening to a torque of $88 \text{ m}\cdot\text{N}$. If a wrench is 28 cm long, what force perpendicular to the wrench must the mechanic exert at its end? If the six-sided bolt head is 15 mm in diameter, estimate the force applied near each of the six points by a socket wrench (Fig. 8-41).

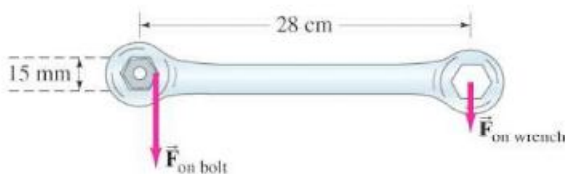


FIGURE 8-41 Problem 26.

8-5 and 8-6 Rotational Dynamics

27. (I) Determine the moment of inertia of a 10.8-kg sphere of radius 0.648 m when the axis of rotation is through its center.
28. (I) Calculate the moment of inertia of a bicycle wheel 66.7 cm in diameter. The rim and tire have a combined mass of 1.25 kg. The mass of the hub can be ignored (why?).
29. (II) A small 650-gram ball on the end of a thin, light rod is rotated in a horizontal circle of radius 1.2 m. Calculate (a) the moment of inertia of the ball about the center of the circle, and (b) the torque needed to keep the ball rotating at constant angular velocity if air resistance exerts a force of 0.020 N on the ball. Ignore the rod's moment of inertia and air resistance.
30. (II) A potter is shaping a bowl on a potter's wheel rotating at constant angular speed (Fig. 8-42). The friction force between her hands and the clay is 1.5 N total. (a) How large is her torque on the wheel, if the diameter of the bowl is 12 cm? (b) How long would it take for the potter's wheel to stop if the only torque acting on it is due to the potter's hand? The initial angular velocity of the wheel is 1.6 rev/s, and the moment of inertia of the wheel and the bowl is $0.11 \text{ kg}\cdot\text{m}^2$.



FIGURE 8-42 Problem 30.

31. (II) Calculate the moment of inertia of the array of point objects shown in Fig. 8-43 about (a) the vertical axis, and (b) the horizontal axis. Assume $m = 1.8 \text{ kg}$, $M = 3.1 \text{ kg}$, and the objects are wired together by very light, rigid pieces of wire. The array is rectangular and is split through the middle by the horizontal axis. (c) About which axis would it be harder to accelerate this array?

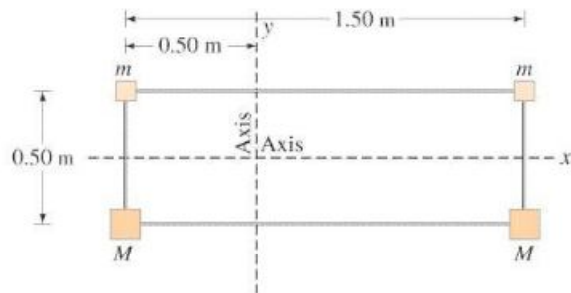


FIGURE 8-43 Problem 31.

32. (II) An oxygen molecule consists of two oxygen atoms whose total mass is 5.3×10^{-26} kg and whose moment of inertia about an axis perpendicular to the line joining the two atoms, midway between them, is 1.9×10^{-46} kg·m². From these data, estimate the effective distance between the atoms.
33. (II) To get a flat, uniform cylindrical satellite spinning at the correct rate, engineers fire four tangential rockets as shown in Fig. 8–44. If the satellite has a mass of 3600 kg and a radius of 4.0 m, what is the required steady force of each rocket if the satellite is to reach 32 rpm in 5.0 min?




FIGURE 8–44
Problem 33.

34. (II) A grinding wheel is a uniform cylinder with a radius of 8.50 cm and a mass of 0.580 kg. Calculate (a) its moment of inertia about its center, and (b) the applied torque needed to accelerate it from rest to 1500 rpm in 5.00 s if it is known to slow down from 1500 rpm to rest in 55.0 s.
35. (II) A softball player swings a bat, accelerating it from rest to 3.0 rev/s in a time of 0.20 s. Approximate the bat as a 2.2-kg uniform rod of length 0.95 m, and compute the torque the player applies to one end of it.
36. (II) A teenager pushes tangentially on a small hand-driven merry-go-round and is able to accelerate it from rest to a frequency of 15 rpm in 10.0 s. Assume the merry-go-round is a uniform disk of radius 2.5 m and has a mass of 760 kg, and two children (each with a mass of 25 kg) sit opposite each other on the edge. Calculate the torque required to produce the acceleration, neglecting frictional torque. What force is required at the edge?
37. (II) A centrifuge rotor rotating at 10,300 rpm is shut off and is eventually brought uniformly to rest by a frictional torque of 1.20 m·N. If the mass of the rotor is 4.80 kg and it can be approximated as a solid cylinder of radius 0.0710 m, through how many revolutions will the rotor turn before coming to rest, and how long will it take?
38. (II) The forearm in Fig. 8–45 accelerates a 3.6-kg ball at 7.0 m/s² by means of the triceps muscle, as shown. Calculate (a) the torque needed, and (b) the force that must be exerted by the triceps muscle. Ignore the mass of the arm.




FIGURE 8–45
Problems 38 and 39.

39. (II) Assume that a 1.00-kg ball is thrown solely by the action of the forearm, which rotates about the elbow joint under the action of the triceps muscle, Fig. 8–45. The ball is accelerated uniformly from rest to 10.0 m/s in 0.350 s, at which point it is released. Calculate (a) the angular acceleration of the arm, and (b) the force required of the triceps muscle. Assume that the forearm has a mass of 3.70 kg and rotates like a uniform rod about an axis at its end.
40. (II) A helicopter rotor blade can be considered a long thin rod, as shown in Fig. 8–46. (a) If each of the three rotor helicopter blades is 3.75 m long and has a mass of 160 kg, calculate the moment of inertia of the three rotor blades about the axis of rotation. (b) How much torque must the motor apply to bring the blades up to a speed of 5.0 rev/s in 8.0 s?




FIGURE 8–46
Problem 40.

41. (III) An *Atwood's machine* consists of two masses, m_1 and m_2 , which are connected by a massless inelastic cord that passes over a pulley, Fig. 8–47. If the pulley has radius R and moment of inertia I about its axle, determine the acceleration of the masses m_1 and m_2 , and compare to the situation in which the moment of inertia of the pulley is ignored. [Hint: The tensions F_{T1} and F_{T2} are not equal. We discussed this situation in Example 4–13, assuming $I = 0$ for the pulley.]

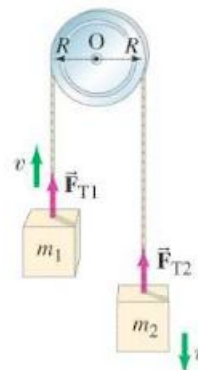


FIGURE 8–47
Problems 41 and 49.
Atwood's machine.

42. (III) A hammer thrower accelerates the hammer (mass = 7.30 kg) from rest within four full turns (revolutions) and releases it at a speed of 28.0 m/s. Assuming a uniform rate of increase in angular velocity and a horizontal circular path of radius 1.20 m, calculate (a) the angular acceleration, (b) the (linear) tangential acceleration, (c) the centripetal acceleration just before release, (d) the net force being exerted on the hammer by the athlete just before release, and (e) the angle of this force with respect to the radius of the circular motion.

8–7 Rotational Kinetic Energy

43. (I) A centrifuge rotor has a moment of inertia of 3.75×10^{-2} kg·m². How much energy is required to bring it from rest to 8250 rpm?
44. (II) An automobile engine develops a torque of 280 m·N at 3800 rpm. What is the power in watts and in horsepower?
45. (II) A bowling ball of mass 7.3 kg and radius 9.0 cm rolls without slipping down a lane at 3.3 m/s. Calculate its total kinetic energy.

46. (II) Estimate the kinetic energy of the Earth with respect to the Sun as the sum of two terms, (a) that due to its daily rotation about its axis, and (b) that due to its yearly revolution about the Sun. [Assume the Earth is a uniform sphere with mass = 6.0×10^{24} kg and radius = 6.4×10^6 m, and is 1.5×10^8 km from the Sun.]
47. (II) A merry-go-round has a mass of 1640 kg and a radius of 7.50 m. How much net work is required to accelerate it from rest to a rotation rate of 1.00 revolution per 8.00 s? Assume it is a solid cylinder.
48. (II) A sphere of radius 20.0 cm and mass 1.80 kg starts from rest and rolls without slipping down a 30.0° incline that is 10.0 m long. (a) Calculate its translational and rotational speeds when it reaches the bottom. (b) What is the ratio of translational to rotational KE at the bottom? Avoid putting in numbers until the end so you can answer: (c) do your answers in (a) and (b) depend on the radius of the sphere or its mass?
49. (III) Two masses, $m_1 = 18.0$ kg and $m_2 = 26.5$ kg, are connected by a rope that hangs over a pulley (as in Fig. 8–47). The pulley is a uniform cylinder of radius 0.260 m and mass 7.50 kg. Initially, m_1 is on the ground and m_2 rests 3.00 m above the ground. If the system is now released, use conservation of energy to determine the speed of m_2 just before it strikes the ground. Assume the pulley is frictionless.
50. (III) A 2.30-m-long pole is balanced vertically on its tip. It starts to fall and its lower end does not slip. What will be the speed of the upper end of the pole just before it hits the ground? [Hint: Use conservation of energy.]

8–8 Angular Momentum

51. (I) What is the angular momentum of a 0.210-kg ball rotating on the end of a thin string in a circle of radius 1.10 m at an angular speed of 10.4 rad/s?
52. (I) (a) What is the angular momentum of a 2.8-kg uniform cylindrical grinding wheel of radius 18 cm when rotating at 1500 rpm? (b) How much torque is required to stop it in 6.0 s?
53. (II) A person stands, hands at his side, on a platform that is rotating at a rate of 1.30 rev/s. If he raises his arms to a horizontal position, Fig. 8–48, the speed of rotation decreases to 0.80 rev/s. (a) Why? (b) By what factor has his moment of inertia changed?



FIGURE 8–48
Problem 53.

54. (II) A diver (such as the one shown in Fig. 8–29) can reduce her moment of inertia by a factor of about 3.5 when changing from the straight position to the tuck position. If she makes 2.0 rotations in 1.5 s when in the tuck position, what is her angular speed (rev/s) when in the straight position?

55. (II) A figure skater can increase her spin rotation rate from an initial rate of 1.0 rev every 2.0 s to a final rate of 3.0 rev/s. If her initial moment of inertia was $4.6 \text{ kg} \cdot \text{m}^2$, what is her final moment of inertia? How does she physically accomplish this change?
56. (II) A potter's wheel is rotating around a vertical axis through its center at a frequency of 1.5 rev/s. The wheel can be considered a uniform disk of mass 5.0 kg and diameter 0.40 m. The potter then throws a 3.1-kg chunk of clay, approximately shaped as a flat disk of radius 8.0 cm, onto the center of the rotating wheel. What is the frequency of the wheel after the clay sticks to it?
57. (II) (a) What is the angular momentum of a figure skater spinning at 3.5 rev/s with arms in close to her body, assuming her to be a uniform cylinder with a height of 1.5 m, a radius of 15 cm, and a mass of 55 kg? (b) How much torque is required to slow her to a stop in 5.0 s, assuming she does *not* move her arms?
58. (II) Determine the angular momentum of the Earth (a) about its rotation axis (assume the Earth is a uniform sphere), and (b) in its orbit around the Sun (treat the Earth as a particle orbiting the Sun). The Earth has mass = 6.0×10^{24} kg and radius = 6.4×10^6 m, and is 1.5×10^8 km from the Sun.
59. (II) A nonrotating cylindrical disk of moment of inertia I is dropped onto an identical disk rotating at angular speed ω . Assuming no external torques, what is the final common angular speed of the two disks?
60. (II) A uniform disk turns at 2.4 rev/s around a frictionless spindle. A nonrotating rod, of the same mass as the disk and length equal to the disk's diameter, is dropped onto the freely spinning disk, Fig. 8–49. They then both turn around the spindle with their centers superposed. What is the angular frequency in rev/s of the combination?




FIGURE 8–49
Problem 60.

61. (II) A person of mass 75 kg stands at the center of a rotating merry-go-round platform of radius 3.0 m and moment of inertia $920 \text{ kg} \cdot \text{m}^2$. The platform rotates without friction with angular velocity 2.0 rad/s. The person walks radially to the edge of the platform. (a) Calculate the angular velocity when the person reaches the edge. (b) Calculate the rotational kinetic energy of the system of platform plus person before and after the person's walk.
62. (II) A 4.2-m-diameter merry-go-round is rotating freely with an angular velocity of 0.80 rad/s. Its total moment of inertia is $1760 \text{ kg} \cdot \text{m}^2$. Four people standing on the ground, each of mass 65 kg, suddenly step onto the edge of the merry-go-round. What is the angular velocity of the merry-go-round now? What if the people were on it initially and then jumped off in a radial direction (relative to the merry-go-round)?

63. (II) Suppose our Sun eventually collapses into a white dwarf, losing about half its mass in the process, and winding up with a radius 1.0% of its existing radius. Assuming the lost mass carries away no angular momentum, what would the Sun's new rotation rate be? (Take the Sun's current period to be about 30 days.) What would be its final KE in terms of its initial KE of today?
64. (III) Hurricanes can involve winds in excess of 120 km/h at the outer edge. Make a crude estimate of (a) the energy, and (b) the angular momentum, of such a hurricane, approximating it as a rigidly rotating uniform cylinder of air (density 1.3 kg/m^3) of radius 100 km and height 4.0 km.
65. (III) An asteroid of mass $1.0 \times 10^5 \text{ kg}$, traveling at a speed of 30 km/s relative to the Earth, hits the Earth at the equator tangentially, and in the direction of Earth's rotation. Use angular momentum to estimate the percent change in the angular speed of the Earth as a result of the collision.

* 8-9 Angular Quantities as Vectors

- * 66. (II) A person stands on a platform, initially at rest, that can rotate freely without friction. The moment of inertia of the person plus the platform is I_P . The person holds a spinning bicycle wheel with its axis horizontal. The wheel has moment of inertia I_W and angular velocity ω_W . What will be the angular velocity ω_P of the platform if the person moves the axis of the wheel so that it points (a) vertically upward, (b) at a 60° angle to the vertical, (c) vertically downward? (d) What will ω_P be if the person reaches up and stops the wheel in part (a)?
- * 67. (III) Suppose a 55-kg person stands at the edge of a 6.5-m diameter merry-go-round turntable that is mounted on frictionless bearings and has a moment of inertia of $1700 \text{ kg} \cdot \text{m}^2$. The turntable is at rest initially, but when the person begins running at a speed of 3.8 m/s (with respect to the turntable) around its edge, the turntable begins to rotate in the opposite direction. Calculate the angular velocity of the turntable.

General Problems

68. A large spool of rope rolls on the ground with the end of the rope lying on the top edge of the spool. A person grabs the end of the rope and walks a distance L , holding onto it, Fig. 8-50. The spool rolls behind the person without slipping. What length of rope unwinds from the spool? How far does the spool's center of mass move?



FIGURE 8-50
Problem 68.

69. The Moon orbits the Earth such that the same side always faces the Earth. Determine the ratio of the Moon's spin angular momentum (about its own axis) to its orbital angular momentum. (In the latter case, treat the Moon as a particle orbiting the Earth.)
70. A cyclist accelerates from rest at a rate of 1.00 m/s^2 . How fast will a point on the rim of the tire (diameter = 68 cm) at the top be moving after 3.0 s? [Hint: At any moment, the lowest point on the tire is in contact with the ground and is at rest—see Fig. 8-51.]



FIGURE 8-51 Problem 70.

71. A 1.4-kg grindstone in the shape of a uniform cylinder of radius 0.20 m acquires a rotational rate of 1800 rev/s from rest over a 6.0-s interval at constant angular acceleration. Calculate the torque delivered by the motor.
72. (a) A yo-yo is made of two solid cylindrical disks, each of mass 0.050 kg and diameter 0.075 m, joined by a (concentric) thin solid cylindrical hub of mass 0.0050 kg and diameter 0.010 m. Use conservation of energy to calculate the linear speed of the yo-yo when it reaches the end of its 1.0-m-long string, if it is released from rest. (b) What fraction of its kinetic energy is rotational?
73. (a) For a bicycle, how is the angular speed of the rear wheel (ω_R) related to that of the pedals and front sprocket (ω_F), Fig. 8-52? That is, derive a formula for ω_R/ω_F . Let N_F and N_R be the number of teeth on the front and rear sprockets, respectively. The teeth are spaced equally on all sprockets so that the chain meshes properly. (b) Evaluate the ratio ω_R/ω_F when the front and rear sprockets have 52 and 13 teeth, respectively, and (c) when they have 42 and 28 teeth.

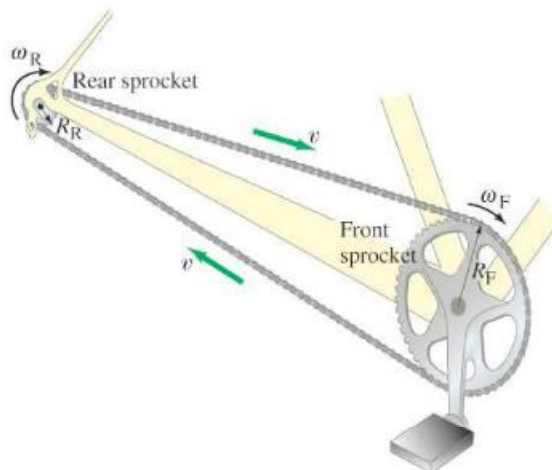


FIGURE 8-52 Problem 73.

74. Suppose a star the size of our Sun, but with mass 8.0 times as great, were rotating at a speed of 1.0 revolution every 12 days. If it were to undergo gravitational collapse to a neutron star of radius 11 km, losing three-quarters of its mass in the process, what would its rotation speed be? Assume that the star is a uniform sphere at all times, and that the lost mass carries off no angular momentum.
75. One possibility for a low-pollution automobile is for it to use energy stored in a heavy rotating flywheel. Suppose such a car has a total mass of 1400 kg, uses a uniform cylindrical flywheel of diameter 1.50 m and mass 240 kg, and should be able to travel 350 km without needing a flywheel "spinup." (a) Make reasonable assumptions (average frictional retarding force = 450 N, twenty acceleration periods from rest to 95 km/h, equal uphill and downhill, and that energy can be put back into the flywheel as the car goes downhill), and show that the total energy needed to be stored in the flywheel is about 1.7×10^8 J. (b) What is the angular velocity of the flywheel when it has a full "energy charge"? (c) About how long would it take a 150-hp motor to give the flywheel a full energy charge before a trip?
76. Figure 8-53 illustrates an H_2O molecule. The O-H bond length is 0.96 nm and the H-O-H bonds make an angle of 104° . Calculate the moment of inertia for the H_2O molecule about an axis passing through the center of the oxygen atom (a) perpendicular to the plane of the molecule, and (b) in the plane of the molecule, bisecting the H-O-H bonds.




FIGURE 8-53
Problem 76.

77. A hollow cylinder (hoop) is rolling on a horizontal surface at speed $v = 3.3$ m/s when it reaches a 15° incline. (a) How far up the incline will it go? (b) How long will it be on the incline before it arrives back at the bottom?
78. A uniform rod of mass M and length L can pivot freely (i.e., we ignore friction) about a hinge attached to a wall, as in Fig. 8-54. The rod is held horizontally and then released. At the moment of release, determine (a) the angular acceleration of the rod, and (b) the linear acceleration of the tip of the rod. Assume that the force of gravity acts at the center of mass of the rod, as shown. [Hint: See Fig. 8-21g.]

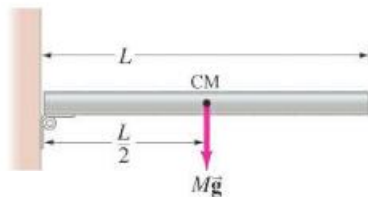


FIGURE 8-54
Problem 78.

79. A wheel of mass M has radius R . It is standing vertically on the floor, and we want to exert a horizontal force F at its axle so that it will climb a step against which it rests (Fig. 8-55). The step has height h , where $h < R$. What minimum force F is needed?


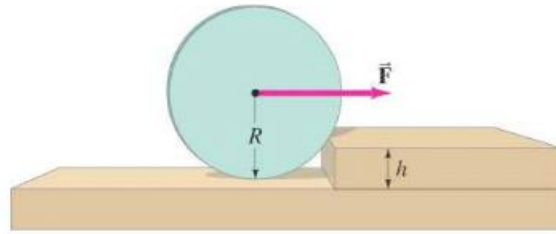


FIGURE 8-55 Problem 79.

80. A bicyclist traveling with speed $v = 4.2$ m/s on a flat road is making a turn with a radius $r = 6.4$ m. The forces acting on the cyclist and cycle are the normal force (\vec{F}_N) and friction force (\vec{F}_{fr}) exerted by the road on the tires, and $m\vec{g}$, the total weight of the cyclist and cycle (see Fig. 8-56). (a) Explain carefully why the angle θ the bicycle makes with the vertical (Fig. 8-56) must be given by $\tan \theta = F_{fr}/F_N$ if the cyclist is to maintain balance. (b) Calculate θ for the values given. (c) If the coefficient of static friction between tires and road is $\mu_s = 0.70$, what is the minimum turning radius?



(a)



(b)

FIGURE 8-56 Problem 80.

81. Suppose David puts a 0.50-kg rock into a sling of length 1.5 m and begins whirling the rock in a nearly horizontal circle above his head, accelerating it from rest to a rate of 120 rpm after 5.0 s. What is the torque required to achieve this feat, and where does the torque come from?
82. Model a figure skater's body as a solid cylinder and her arms as thin rods, making reasonable estimates for the dimensions. Then calculate the ratio of the angular speeds for a spinning skater with outstretched arms, and with arms held tightly against her body.

83. You are designing a clutch assembly which consists of two cylindrical plates, of mass $M_A = 6.0$ kg and $M_B = 9.0$ kg, with equal radii $R = 0.60$ m. They are initially separated (Fig. 8–57). Plate M_A is accelerated from rest to an angular velocity $\omega_1 = 7.2$ rad/s in time $\Delta t = 2.0$ s. Calculate (a) the angular momentum of M_A , and (b) the torque required to have accelerated M_A from rest to ω_1 . (c) Plate M_B , initially at rest but free to rotate without friction, is allowed to fall vertically (or pushed by a spring), so it is in firm contact with plate M_A (their contact surfaces are high-friction). Before contact, M_A was rotating at constant ω_1 . After contact, at what constant angular velocity ω_2 do the two plates rotate?




FIGURE 8–57
Problem 83.

84. A marble of mass m and radius r rolls along the looped rough track of Fig. 8–58. What is the minimum value of the vertical height h that the marble must drop if it is to reach the highest point of the loop without leaving the track? Assume $r \ll R$, and ignore frictional losses.
85. Repeat Problem 84, but do not assume $r \ll R$.

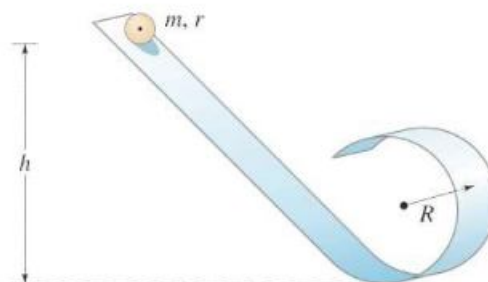


FIGURE 8–58 Problems 84 and 85.

86. The tires of a car make 85 revolutions as the car reduces its speed uniformly from 90.0 km/h to 60.0 km/h. The tires have a diameter of 0.90 m. (a) What was the angular acceleration of each tire? (b) If the car continues to decelerate at this rate, how much more time is required for it to stop?

Answers to Exercises

A: $f = 0.076$ Hz; $T = 13$ s.

B: \vec{F}_A .

C: Yes; she does work to pull in her arms.

D: Work was done in pulling the string and decreasing the circle's radius.